

NOBLE ENERGY INC.
AGRICULTURAL PRODUCTS FEDERAL 32-07F
SWNE 32-4N-66W
2153 FNL & 2105 FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
1/14/2016

API: 05-123-15577
 COGCC #

GL Elev: 4770'
 KB Elev: 4781'


Spud Date: 2/21/1992

Surface Casing :
 8-5/8" @ 519'
 Cement: 360 sx
 TOC: Surface

TOC @ 6265'

Nio Top 6957'

Production Casing :
 4-1/2" 11.6# M-75 @ 7415'
 Cement: 200 sx
 TD Date: 2/26/1992

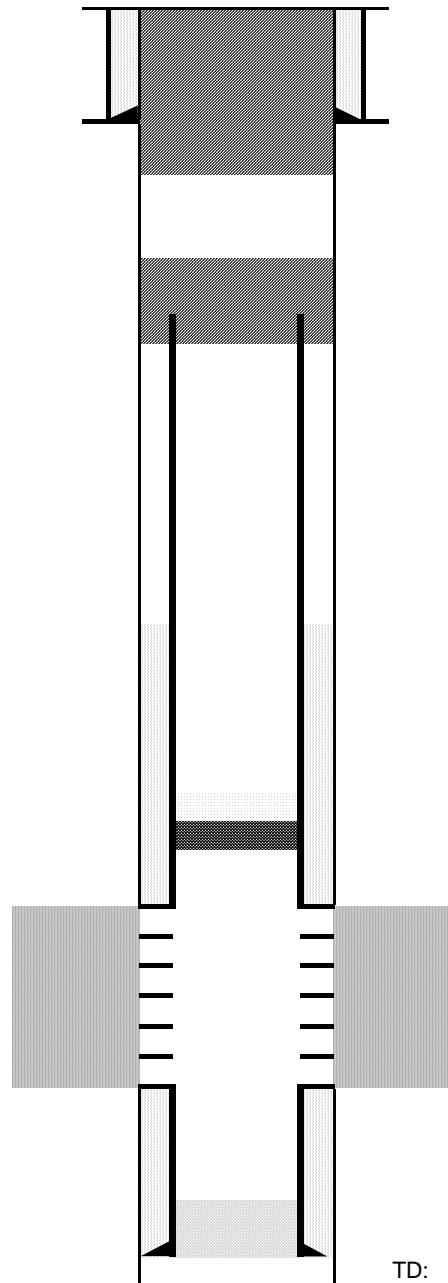

Cut surface casing off 6'-8' below surface.

Pump approx 215 sx shoe plug @ 690'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 6930' w/ 2 sx cement on top

Niobrara Perforations 6980'-7000', 7062'-7070', & 7146'

Codell Perforations 7291'-7307'

TD: 7426'