

NOBLE ENERGY INC.
WELLS RANCH USX BB01-23
NESE 1-5N-63W
1397 FSL & 1053 FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
1/19/2016

API: 05-123-25110
 COGCC #

GL Elev: 4664'
 KB Elev: 4676'


Spud Date: 6/4/2007

Surface Casing :
 8-5/8" 24# J-55 @ 471'
 Cement: 228 sx
 TOC: Surface

TOC @ 1456'

Nio Top 6326'

Production Casing :
 4-1/2" 11.6# M-80 @ 6727'
 Cement: 880 sx
 TD Date: 6/8/2007

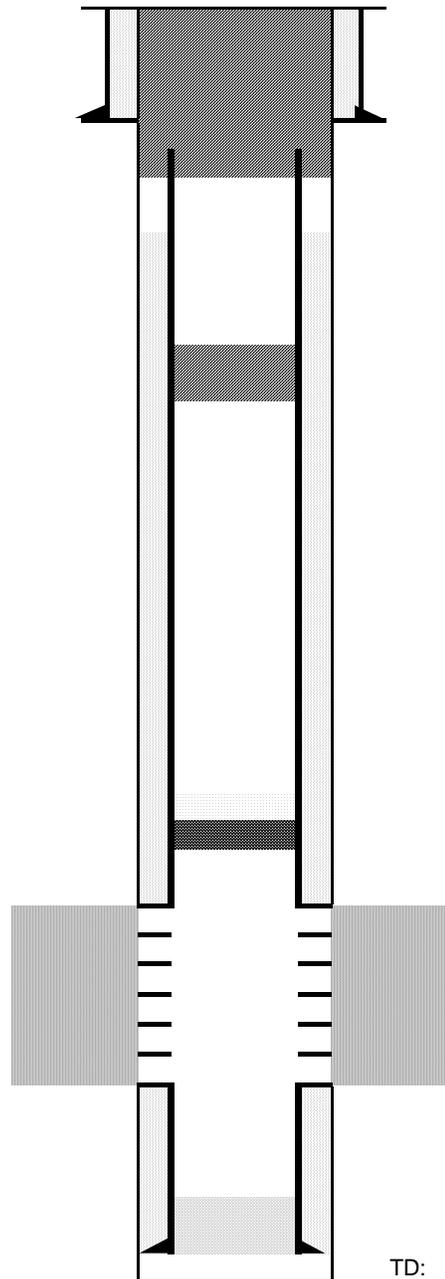

Cut surface casing off 6'-8' below surface.

Pump approx 190 sx stub & shoe plug
 where csg was pulled
 Will bring cement to surface.

Cut and pull csg @ 600'

Pump 50 sx balanced plug at 2500'

CIBP @ 6280' w/ 2 sx cement on top

Niobrara Perforations 6330'-6344' & 6418'-6434'

Codell Perforations 6592'-6602'

TD: 6749'