

NOBLE ENERGY INC.
 Wells Ranch AF06-05
 SWNW 6-5N-62W
 1826 FNL & 540 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 1/18/2016

API: 05-123-30168
 COGCC #


GL Elev: 4692
 KB Elev: 4705

Spud Date:

Surface Casing :
 8-5/8" 24# J-55 @ 523'
 Cement (sxs): 205
 TOC: Surface

TOC @ ~ 690'

Production Casing :
 4-1/2" 11.6# N-80 @ 6763'
 Cement (sxs): 780
 TD: 5/28/2009

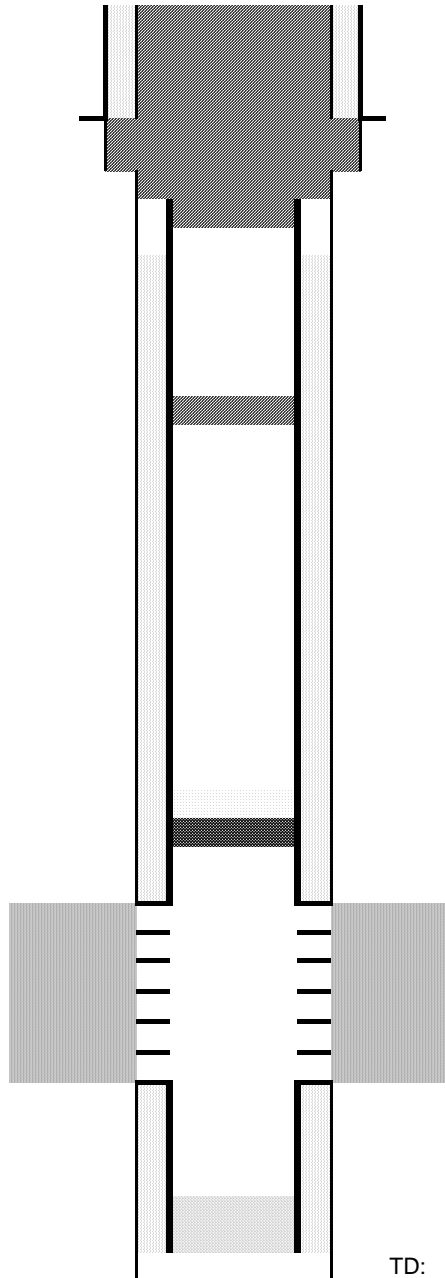

Add 10 sx plug at surface.
 Cut surface casing off 6'-8' below surface.

Pump 250 sx shoe/stub plug from 625' to surface

Pump 100 sx stub plug @ 2500'

CIBP @ 6312' w/ 2 sx cement on top

Niobrara Perforations: 6,362' - 6,464'

Codell Perforations: 6,622' - 6,632'

TD: 6774