

NOBLE ENERGY INC.
 Wells Ranch USX BB01-07
 SWNE 1-5N-63W
 1848 FNL & 1955 FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 1/22/2016

API: 05-123-26101
 COGCC #


GL Elev: 4701
 KB Elev: 4713

Spud Date:

Surface Casing :
 8-5/8" 24# J-55 @ 446'
 Cement (sxs): 231
 TOC: Surface

TOC @ ~ 1842'

Production Casing :
 4-1/2" 11.6# M-80 @ 7228'
 Cement (sxs): 970
 TD: 8/18/2007

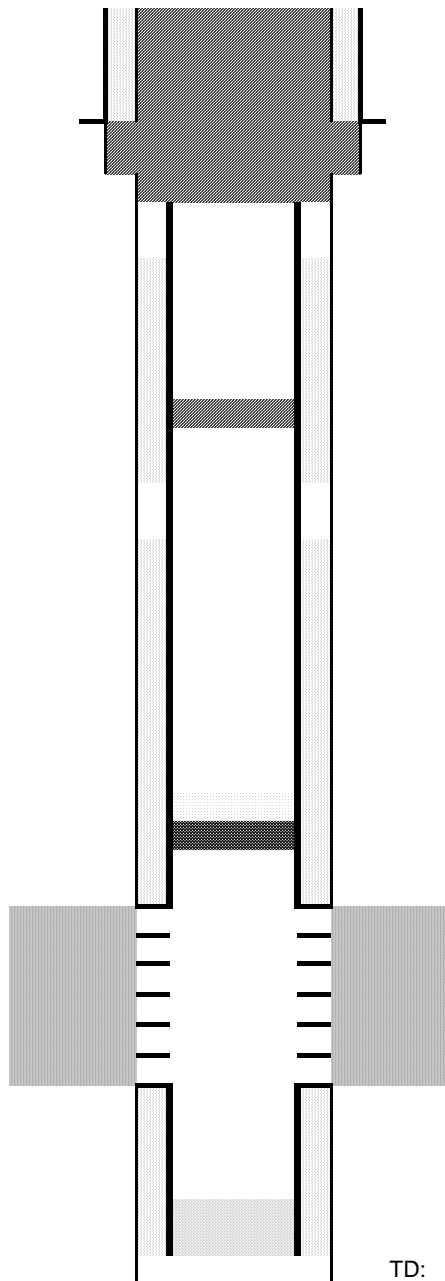

Add 10 sx plug at surface.
 Cut surface casing off 6'-8' below surface.

Pump 225 sx shoe/stub plug from 560' to surface

Pump 20 sx balanced plug @ 2500'

CIBP @ 6313' w/ 2 sx cement on top

Niobrara Perforations: 6,363' - 6,468'

Codell Perforations: 6,626' - 6,636'

TD: 7245