

NOBLE ENERGY INC.
LARSON A25-23
NESE 25-6N-64W
1330' FSL & 1320' FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
2/4/2016

API: 05-123-26465
 COGCC #


GL Elev: 4636'
 KB Elev: 4646'

Spud Date: 11/20/2007

Surface Casing :
 8 5/8" 24# @ 774'
 Cement: 401 sx
 TOC: Surface

TOC @ 2100'

Production Casing :
 4 1/2" 11.6# @ 6935'
 Cement: 1030 sx
 TD: 11/25/2007

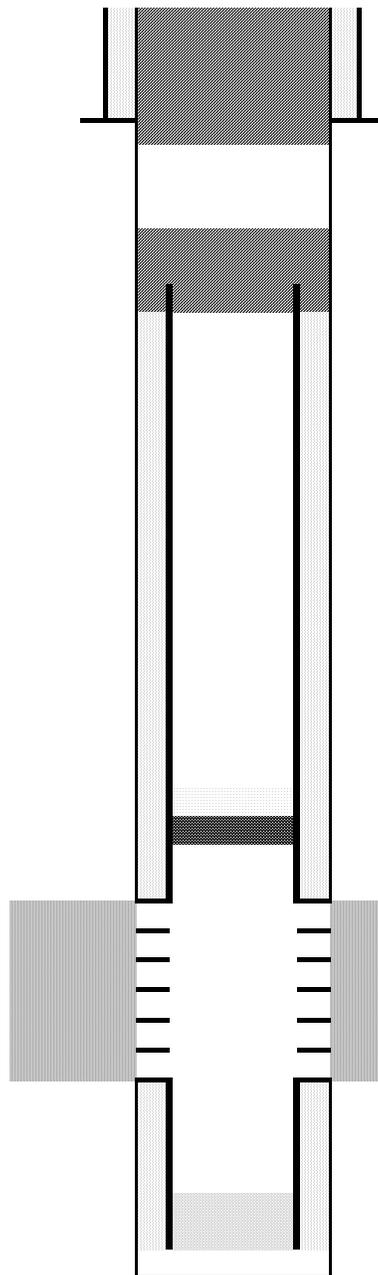

Cut surface casing off 6'-8' below surface.

Pump approx 300 sx shoe plug @ 880'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2050'

CIBP @ 6438' w/ 2 sx cement on top

Niobrara Perforations 6488' - 6612'

Codell Perforations 6768' - 6782'

TD: 6940'