

NOBLE ENERGY INC.
Larson A25-02
NWNE 25-6N-64W
676' FNL & 1786' FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
2/10/2016

API: 05-123-14702
COGCC #

GL Elev: 4640'
KB Elev: 4650'

Spud Date: 9/20/1990

Surface Casing :
8 5/8" 24# @ 273'
Cement: 275 sx
TOC: Surface

Remedial Casing Cmt: 2044' to 4297'


Remedial Casing Cmt: 5148' to 5197'

TOC @ 5930'

Nio Top 6493'

Production Casing :
2 7/8" 6.5# N-80 @ 6947'
Cement: 285 sx
TD: 6950'

Auto cemtn Plug: 6915'-6947'

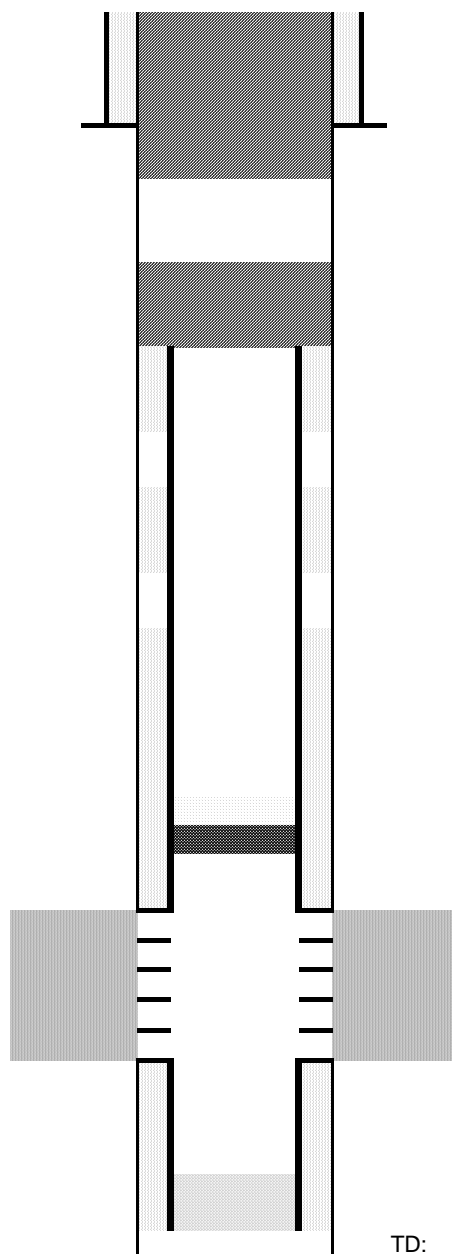

Cut surface casing off 6'-8' below surface.

Pump approx 255 sx shoe plug @ 850'
Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
Cut and pull csg @ 2040'

Pump 15 sx of cement on top of CIBP

CIBP @ 6747'

Codell Perforations 6797' - 6810'

TD: 6950'