

NOBLE ENERGY INC.
HSR WIEDEMAN 09-20
NESE 20-5N-66W
1800 FSL & 710 FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
2/11/2016

API: 05-123-19149
COGCC #

GL Elev: 4871'
KB Elev: 4882'


Spud Date: 4/12/1996

Surface Casing :
8-5/8" 23# @ 441'
Cement: 310 sx
TOC: Surface

TOC @ 6080'

Nio Top 7037'

Production Casing :
4-1/2" 11.6# I-70 @ 7452'
Cement: 220 sx
TD Date: 4/15/1996

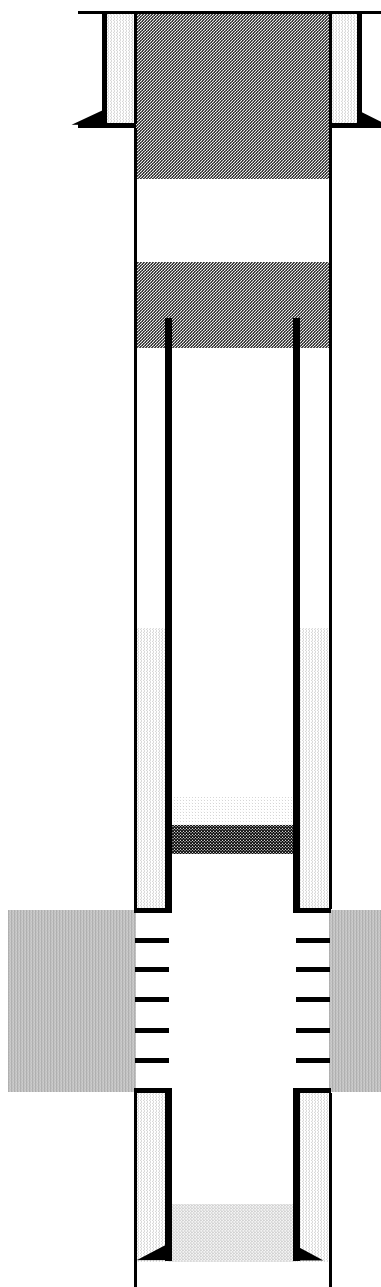

Cut surface casing off 6'-8' below surface.

Pump approx 175 sx shoe plug @ 550'
Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
Cut and pull csg @ 2500'

CIBP @ 6993' w/ 2 sx cement on top

Niobrara Perforations 7043'-7045'

Codell Perforations 7309'-7319'

TD: 7473'