

**NOBLE ENERGY INC.**  
 HSR-Guttersen 2-4  
 NWNE 4-2N-64W  
 660 FNL & 2030 FEL  
 WELD COUNTY, CO  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 2/17/2016

API: 05-123-19151

KB Elev: 4872'  
 GL Elev: 4862'


Spud Date: 4/27/1996

**Surface Casing :**  
 8 5/8", 23# @ 809'  
 Cement: 565 sx  
 TOC: Surface

TOC @ 3594'

TOC @ 6258'

**Production Casing :**  
 4 1/2", 11.6#, I-70 @ 7169'  
 Cement: 260 + 130 sx  
 Run Date: 5/2/1996

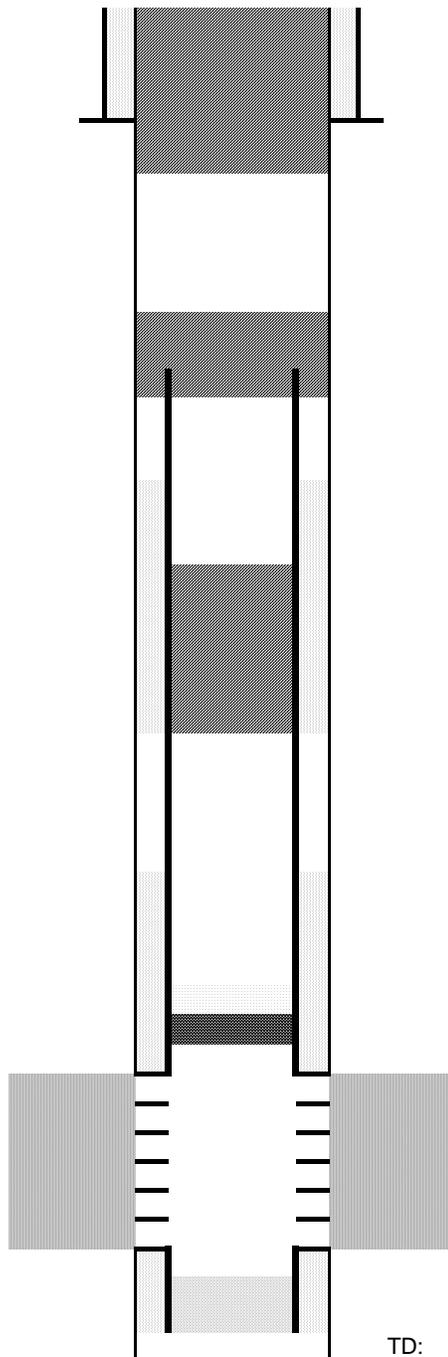

Cut surface casing off 6'-8' below surface.

Pump approx 310 sx shoe plug @ 909'  
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled  
 Cut and pull csg @ 2500'

Pump 45 sx balance plug from 4650' - 4050'

CIBP @ 6749' w/ 2 sx cement on top

Niobrara Perforations: 6799' - 6802'

Codell Perforations: 7027' - 7032'

TD: 7176'