

NOBLE ENERGY INC.
 HSR WIEDEMAN 10-20
 NWSE 20-5N-66W
 1980 FSL & 2159 FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 2/11/2016

API: 05-123-19138
 COGCC #

GL Elev: 4904'
 KB Elev: 4914'


Spud Date: 4/3/1996

Surface Casing :
 8-5/8" 23# @ 413'
 Cement: 290 sx
 TOC: Surface

TOC @ 6520'

Nio Top 7047'

Production Casing :
 4-1/2" 11.6# I-70 @ 7523'
 Cement: 145 sx
 TD Date: 4/6/1996

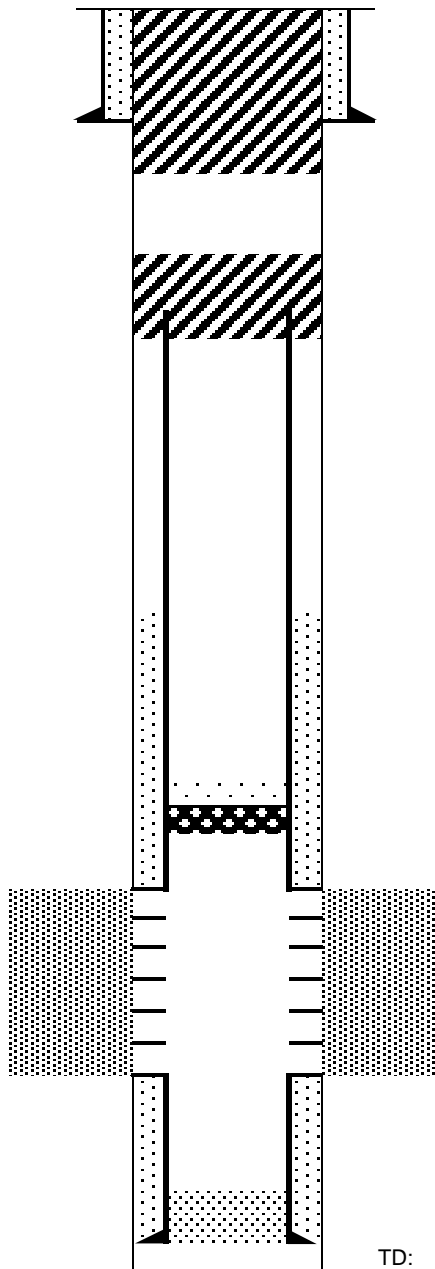

Cut surface casing off 6'-8' below surface.

Pump approx 185 sx shoe plug @ 580'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 7007' w/ 2 sx cement on top

Niobrara Perforations 7057'-7058' & 7189'-7190'

Codell Perforations 7367'-7377'

TD: 7535'