

NOBLE ENERGY INC.
DETENNE 01-23
NWSE 23-6N-67W
1780 FSL & 1980 FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
2/24/2016

API: 05-123-12283
COGCC #

GL Elev: 4765'
KB Elev: 4775'

Spud Date: 3/18/1985

Surface Casing :

9 5/8" 36# @ 411'

Cement: 292

TOC: Surface

TOC @ 5875'


Nio Top

Production Casing :

5 1/2" 17.0#, N-80 @ 7287'

Cement: 225

TD: 3/23/1985

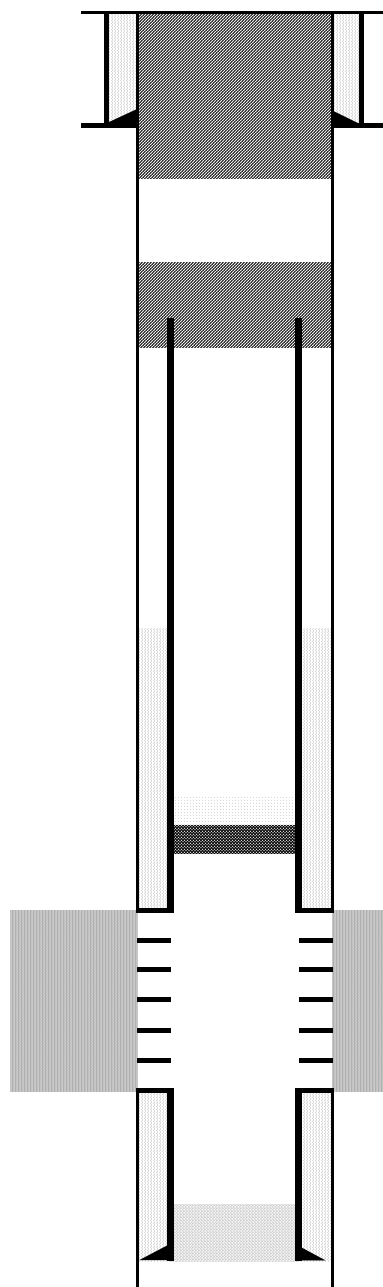

Cut surface casing off 6'-8' below surface.

Pump approx 201sx shoe plug @ 530'
Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
Cut and pull csg @ 2500'

CIBP @ 6902' w/ 2 sx cement on top

Niobrara Perforations 6952' - 6978'

Codell Perforations 7146' - 7163

TD: 7312'