

NOBLE ENERGY INC.
MOBILE PREMIX I35-06
SWNW 35-6N-66W
2032 FNL & 692 FWL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
2/19/2016

API: 05-123-23218
 COGCC #

GL Elev: 4678'
 KB Elev: 4690'


Spud Date: 10/15/2005

Surface Casing :
 8 5/8" 24#, J-55 @ 533'
 Cement: 460
 TOC: Surface

TOC @ 2930'

Nio Top 7015'

Production Casing :
 4 1/2" 11.60#, M-80 @ 7508'
 Cement: 620
 TD: 10/21/2005

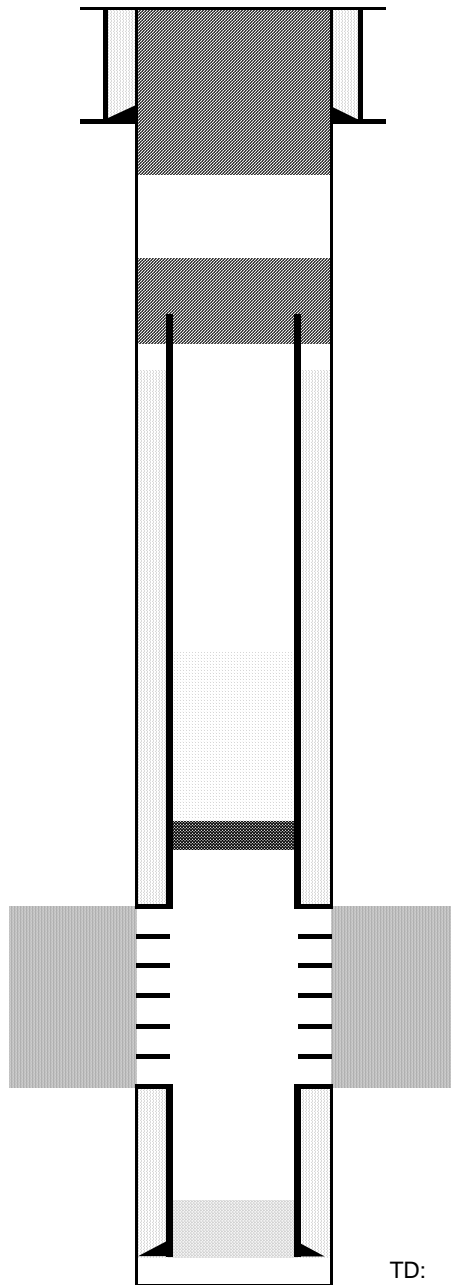

Cut surface casing off 6'-8' below surface.

Pump approx 203 sx shoe plug @ 583'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 7290' pump 46 sx cement on top

Codell Perforations 7340' - 7356'

TD: 7518'