

NOBLE ENERGY INC.
ROTHE STATE B36-08
SENE 36-5N-64W
1976' FNL & 609' FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
3/4/2016

API: 05-123-16705
COGCC #

GL Elev: 4587'
KB Elev: 4597'

Spud Date: 2/25/1993

Surface Casing :
8 5/8" 24# @ 313'
Cement: 410 sx
TOC: Surface


Annular Fill Cement from 1672' - 2500'

Cement Patch @ 5199' (11/10/2010)
Annular Fill Cement from 5170' to 5251'

TOC @ 5780'

Nio Top @ 6354'

Production Casing :
2 7/8" 6.5# @ 6810'
Cement: 275 sx
TD: 3/3/1993

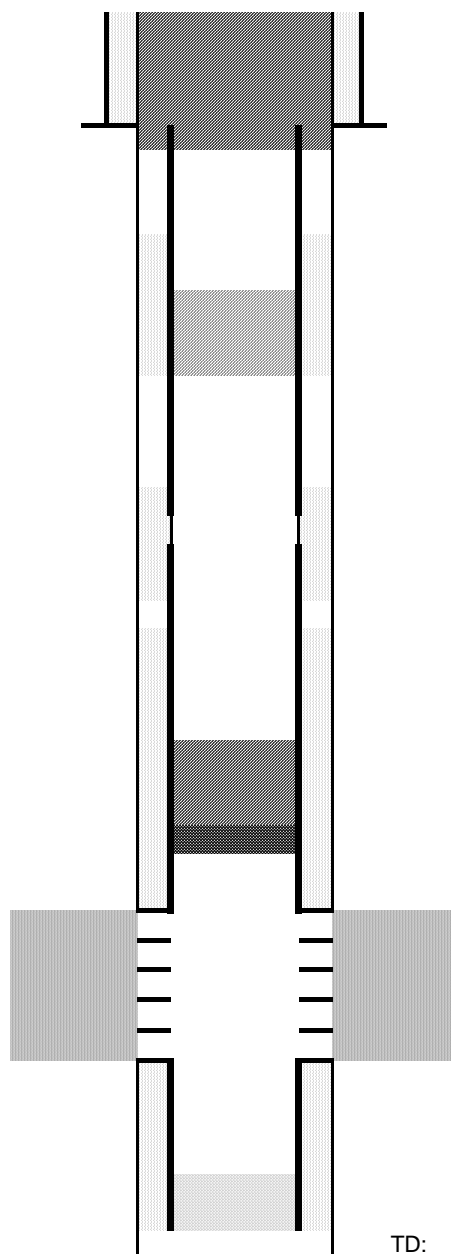

Cut surface casing off 6'-8' below surface.

Pump approx 140 sx shoe plug @ 420'
Will bring cement to surface.
Cut and pull casing @ 420'

Pump 7 sx Courtesy Plug @ 2500'

Pump 10 sx on top of CIBP

CIBP @ 6574'

Codell Perforations 6624' - 6637'

TD: 6817'