

NOBLE ENERGY INC.
 KY H25-24
 SWSE 25-3N-65W
 1300' FSL & 2567' FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 3/7/2016

API: 05-123-24447
 COGCC #

GL Elev: 4804'
 KB Elev: 4816'

Spud Date: 11/28/2006


Surface Casing :
 8 5/8" 24# J-55 @ 679'
 Cement: 340 sx
 TOC: Surface

Production Csg Cmt 3760' - 4852' (12/4/2006)

TOC @ 6004'

Nio Top 6783'

Production Casing :
 4 1/2" 11.6# M-80 @ 7628'
 Cement: 650 sx
 TD: 12/4/2006

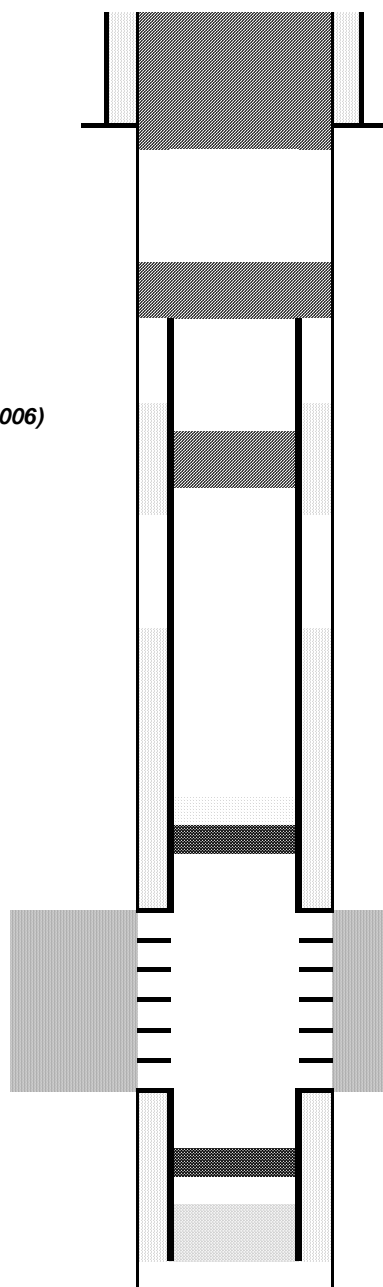

Cut surface casing off 6'-8' below surface.

Pump approx 255 sx shoe plug @ 779'
 Will bring cement to surface.

Cut and pull csg @ 2500'
 Pump 100 sx stub plug where csg pulled

Pump 30 sx balance plug @ 4500'
 To isolate Sussex

CIBP @ 6770' w/ 2 sx cement on top

Niobrara Perforations 6820' - 6838'

Codell Perforations 7057' - 7069'

Cast Iron Flow Through Plug 7532' - 7534' (3/27/2007)

TD: 7681'