

NOBLE ENERGY INC.
 BLEHM 07
 SWSE 24-5N-67W
 645 FSL & 1995 FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 2/29/2016

API: 05-123-11217
 COGCC #

GL Elev: 5026'
 KB Elev: 5036'


Spud Date: 6/28/1983

Surface Casing :
 8-5/8" 24# @ 268'
 Cement: 225 sx
 TOC: Surface

TOC @ 6806'

Nio Top 7240'

Production Casing :
 4-1/2" 11.60# J-55 @ 7619'
 Cement: 200 sx
 TD Date: 7/5/1983

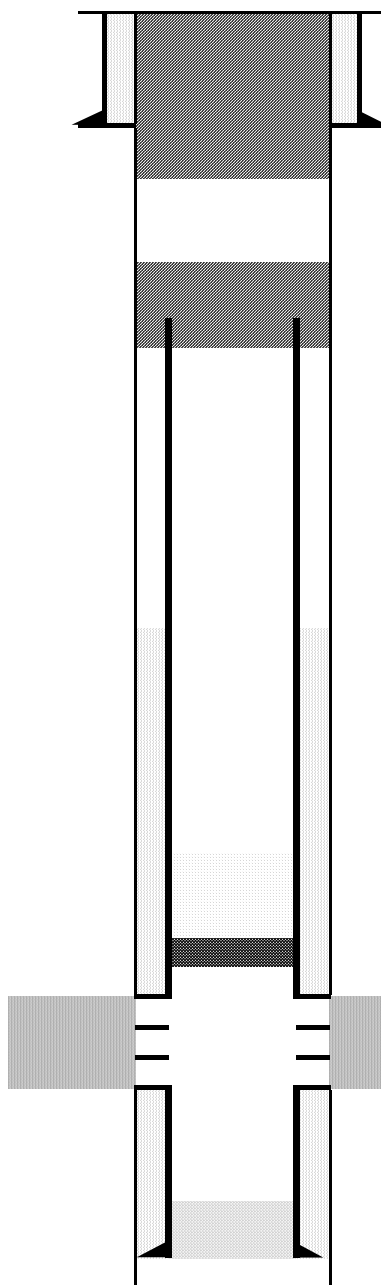

Cut surface casing off 6'-8' below surface.

Pump approx 220 sx shoe plug @ 702'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 7470' w/ 30 sx cement on top

Codell Perforations 7520'-7530'

TD: 7620'