

**NOBLE ENERGY INC.**  
CECIL FARMS#06-14  
SENE 6-6N-66W  
1965' FNL & 682' FEL  
WELD COUNTY, CO  
Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
with PROPOSED P&A  
3/22/2016

API: 05-123-22328  
COGCC #

GL Elev: 4878'  
KB Elev: 4888'

Spud Date: 10/5/2004


**Surface Casing :**  
8 5/8" 24# (Grade not specified) @ 418'  
Cement: 200 sx  
TOC: Surface

**Remedial cement** surface to 1380'

TOC @ 1422'

Niobrara Top @ 7015'

**Production Casing :**  
4 1/2" 11.6# (Grade not specified) @ 7503'  
Cement: 815 sx  
TD: 10/11/2004

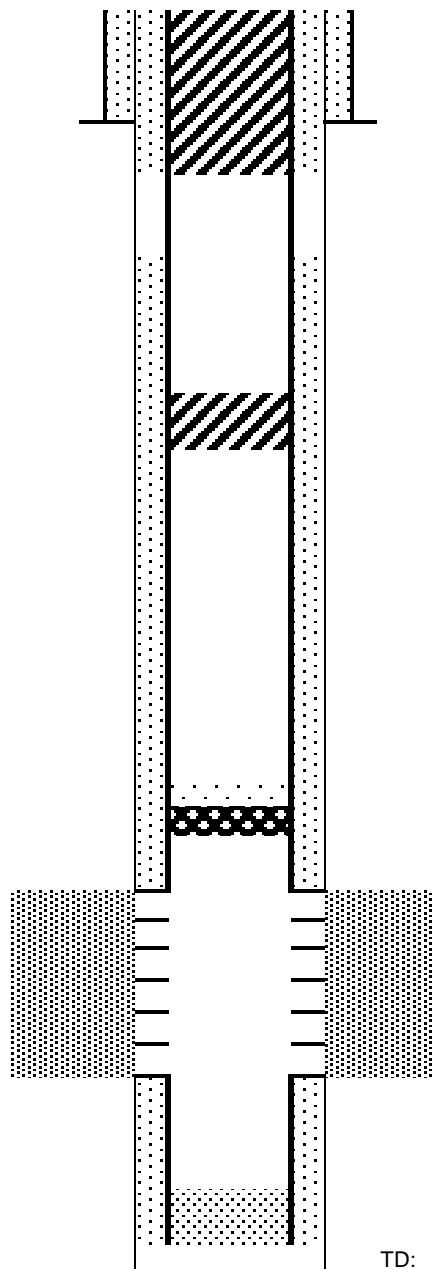

Cut surface casing off 6'-8' below surface.

Pump 80 sx plug in production csg  
Will bring cmt to surface

Deepest water well within 1 mile (850') + 150' : 1000'  
Foxhills bottom: (417') + 150' = 557'  
Casing shoe (418') + 100': 518'

Pump 20 sx courtesy plug from 2500' to 2300'

No producing Sussex within 1 mile.

CIBP @ 6982' w/ 2 sx cement on top

Niobrara Perforations 7032' - 7261'

Codell Perforations 7340' - 7356'

TD: 7508'