

NOBLE ENERGY INC.

Trebor #B11-11
NESW 11-5N-64W
2036 FSL & 2175 FWL
WELD COUNTY, CO
Wattenberg

CURRENT WELLBORE SCHEMATIC W/ PROPOSED P&A 3/24/2016


API: 05-123-13820
COGCC #

Spud Date: 2/22/1988

GL Elev: 4595
KB Elev: 4606

Surface Casing :

8.625" 24# (Grade ?) SET AT 304'
Cement: 200 sx
TOC: Surface

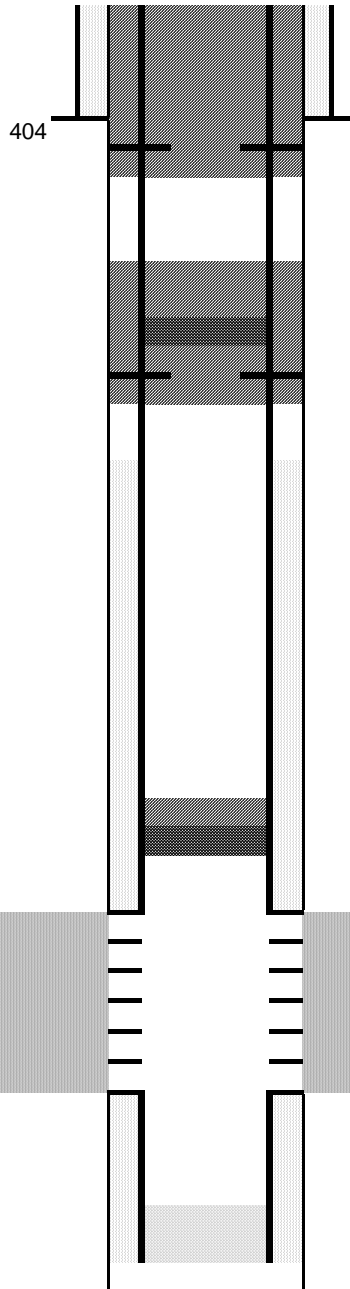

Cut surface casing off 6'-8' below surface.

Pump approx 165 sx shoe plug at 404'

137 sx out and 28 sx in

Will bring cement to surface.

Surface Casing = 304' + 100' = 404'

Deepest water well perf = 94' + 150' = 244'

Fox Hills = 245' + 150' = 395'

Shoot holes at 2500' & 404'

Set CIBC at 2400' and cement with: 90 sx
83 sx through and 7 sx on top

TOC @ 5682
NIO Top @ 6436
Codell Top @ 6716

No SUSSEX Production within a mile

Set CIBP @ 6388 w/ 2 sx cement

NIOBRARA Perforations 6438' - 6633'

CODELL Perforations 6716' - 6729'

Production Casing :

4.5" 15.1# N-80 SET AT 6839'
Cement: 220 sx
TD: 2/26/1988

TD: 6910