

NOBLE ENERGY INC.
 Gurtler 24-15J
 SWSE 24-3N-65W
 660' FSL & 1930' FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 3/24/2016

API: 05-123-15153
 COGCC #

GL Elev: 4807'
 KB Elev: 4816'


Spud Date: 9/3/1991

Surface Casing :
 8 5/8" 23# WC-50 @ 670'
 Cement: 460 sx
 TOC: Surface

TOC @ 6139'

Nio Top 6756'

Production Casing :
 4 1/2" 11.6# M-75 @ 7180'
 Cement: 200 sx
 TD: 9/7/1991

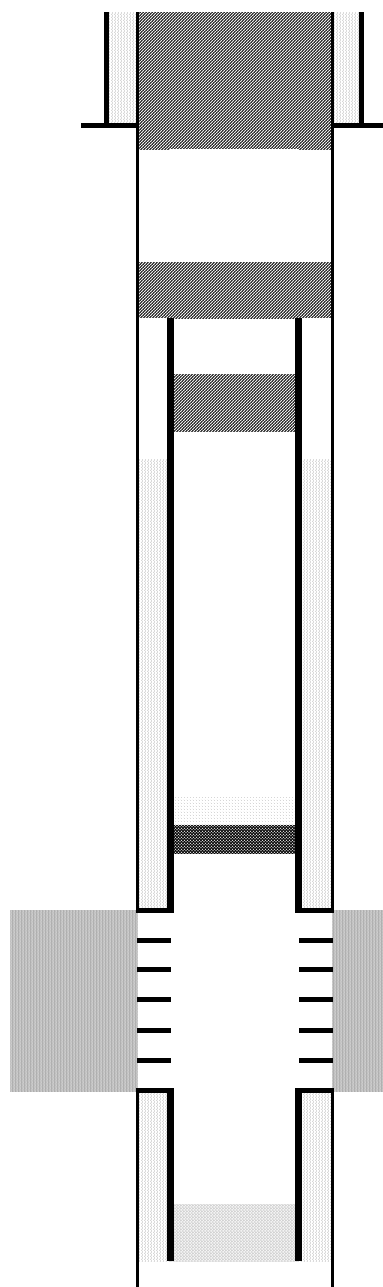

Cut surface casing off 6'-8' below surface.

Pump approx 255 sx shoe plug @ 770'
 Will bring cement to surface.

Cut and pull csg @ 2500'
 Pump 100 sx stub plug where csg pulled

Pump 30 sx balance/courtosey plug @ 4500'
 Producing Sussex well within 1 mile

CIBP @ 6734' w/ 2 sx cement on top

Niobrara Perforations 6784' - 6934'

Codell Perforations 7061' - 7075'

TD: 7185'