

**NOBLE ENERGY INC.**  
 Rohr 15-06  
 SENW 15-4N-64W  
 1976' FNL & 1794' FWL  
 WELD COUNTY, CO  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 3/22/2016

API: 05-123-17604  
 COGCC #

GL Elev: 4645'  
 KB Elev: 4656'


**Spud Date:** 11/14/1993

**Surface Casing :**  
 8-5/8"; 23 ppf; M-50 set at 512'  
 Cement: 261 sx  
 TOC: Surface

**TOC @ 6096'**

**Nio Top 6513'**

**Production Casing :**  
 3-1/2"; 7.7 ppf; M-75 set at 6924'  
 Cement: 351 sx  
 TD: 11/19/1993

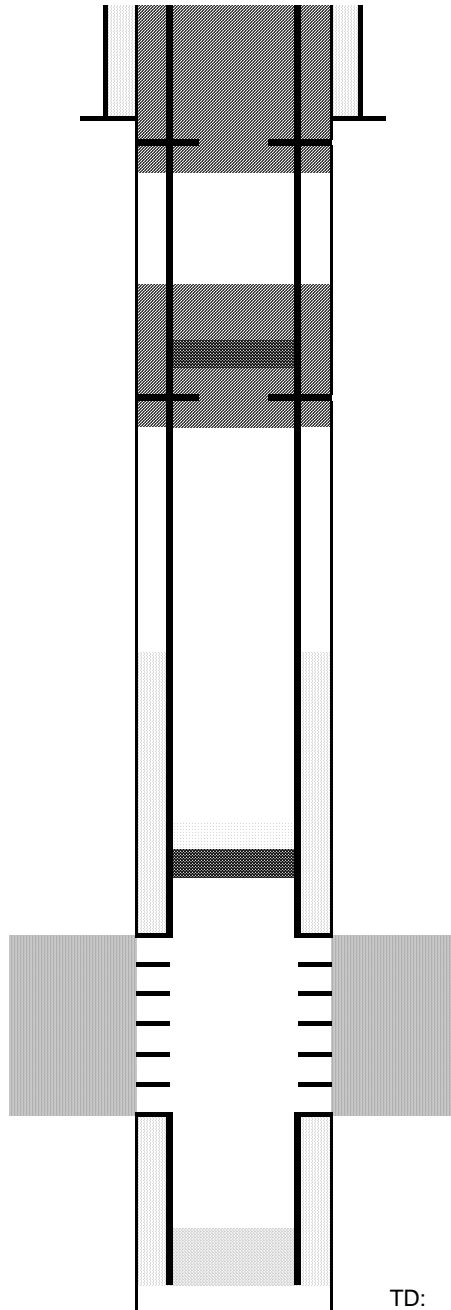

Cut surface casing off 6'-8' below surface.

**Pump approx 235 sx shoe plug @ 612'.**  
 205 sx out and 30 sx in  
**Will bring cement to surface.**

Perforate @ 612'  
 Deepest water well = 335' + 150' = 485'  
 Surface casing = 512' + 100' = 612'  
 Fox Hills = 286' + 150' = 436'

Set CICR @ 2400'  
 Pump a total of 95 sx  
 Leave 100' cmt on top of CICR  
 90 sx through and 5 sx on top  
 Perforate @ 2500'

No producing Sussex within 1 mile.

CIBP @ 6482' w/ 2 sx cement on top

Niobrara Perforations 6532' - 6682'  
 Codell Perforations 6801' - 6812'

TD: 6940'