

NOBLE ENERGY INC.

Bickling #3-43
SWSE 3-6N-65W
670 FSL & 1984 FEL
WELD COUNTY, CO
Wattenberg

**CURRENT WELLBORE SCHEMATIC W/ PROPOSED P&A
4/4/2016**

API: 05-123-21622
COGCC #

Spud Date: 11/25/2003

GL Elev: 4804
KB Elev: 4814

Surface Casing :

8.625" 24# SET AT 396'
Cement: 280 sx
TOC: Surface


Cut surface casing off 6'-8' below surface.

Pump approx 50 sx shoe plug at 627'
Will bring cement to surface.

Deepest water well = 420' + 150' = 570'
No Sussex Production within a mile
Fox Hills = 477' + 150' = 627'

Pump a courtesy plug at 2500' w/ 20 sx

TOC @ 5865 & 0'
Nio top @ 6832'
Codell top @ 7126'

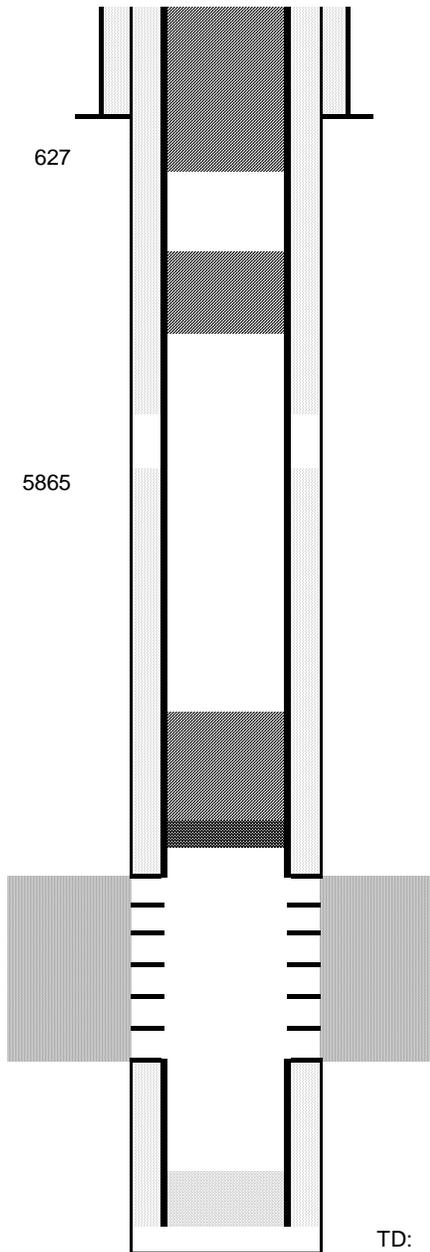

Set CIBP @ 7078 w/ 30 sx cement
on top to 6732' inside casing.

CODELL Perforations 7128' - 7141'

Production Casing :

4.5" 11.6# SET AT 7245'
Cement: 220 sx
TD: 11/29/2003

TD: 7250