

**NOBLE ENERGY INC.**  
 Monfort BB30-06  
 SENW 30-5N-63W  
 1975' FNL & 2000' FWL  
 WELD COUNTY, CO  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 3/24/2016

API: 05-123-15533  
 COGCC #


GL Elev: 4574.0'  
 KB Elev: 4583.0'

**Spud Date:** 10/4/1992

**Surface Casing :**  
 8 5/8" 24# (Grade not Specified) @337.0'  
 Cement: 325 sx  
 TOC: Surface

**TOC @ 5488'**  
**Niobrara Top 6310'**  
**Codell Top 6594'**

**Production Casing :**  
 2 7/8" 8.7# N-80 @ 6747.0'  
 Cement: 260 sx  
 TD: 10/9/1992

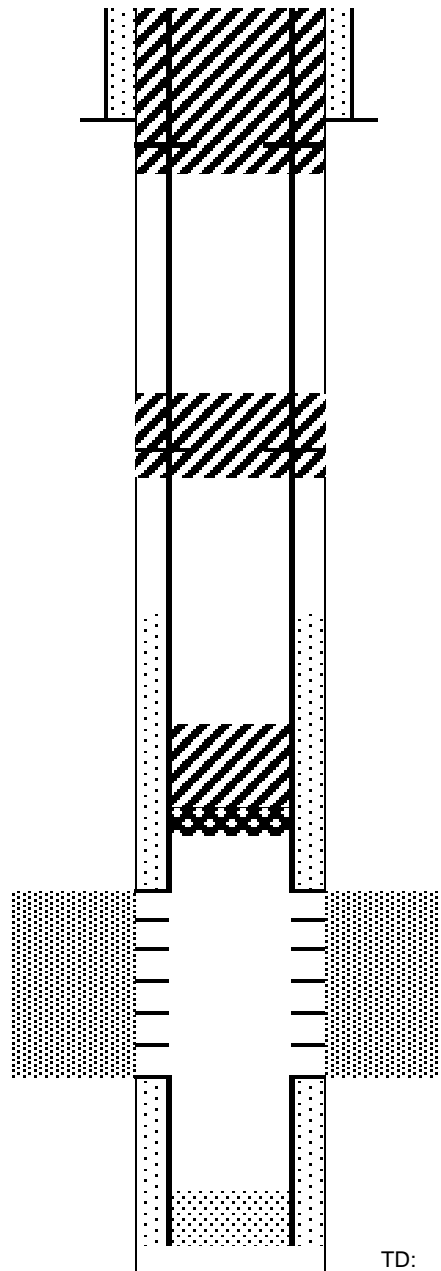

**Cut surface casing off 6'-8' below surface.**

**Perforate at 437.0' (100 ft below surface casing shoe)**  
**Pump 180 Sxs**  
**169 sx out and 11 sx in**  
**Will bring cement to surface.**

Deepest water well within 1 mile (122') +150' : 272'  
 Foxhills bottom (127')+150': 277'  
 Casing shoe (337')+ 100': 437'

**Set CICR @ 2400'**  
**Perforate @ 2500'**  
**Pump 95 sx courtesy plug, with 90 sx**  
**of cement outside and 5 sx inside of casing**

**No producing Sussex within 1 mile.**

**CIBP @ 6546.0' w/10 sx cement on top**

**Codell Perforations 6596.0'-6607.0'**

**TD: 6775.0'**