

NOBLE ENERGY INC.
 Severin 04-13G6
 SWSW 4-6N-66W
 446 FSL & 715 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 3/28/2016

API: 05-123-18234
 COGCC #

GL Elev: 4826'
 KB Elev: 4840'


Spud Date: 4/25/1994

Surface Casing :
 7" 17 # H-40 @ 458'
 Cement: 180 sx
 TOC: Surface

TOC @ 6401'

Nio Top 6974'

Production Casing :
 3 1/2" 7.7# (Grade not specified) @ 7400'
 Cement: 90 sx
 TD: 5/7/1994

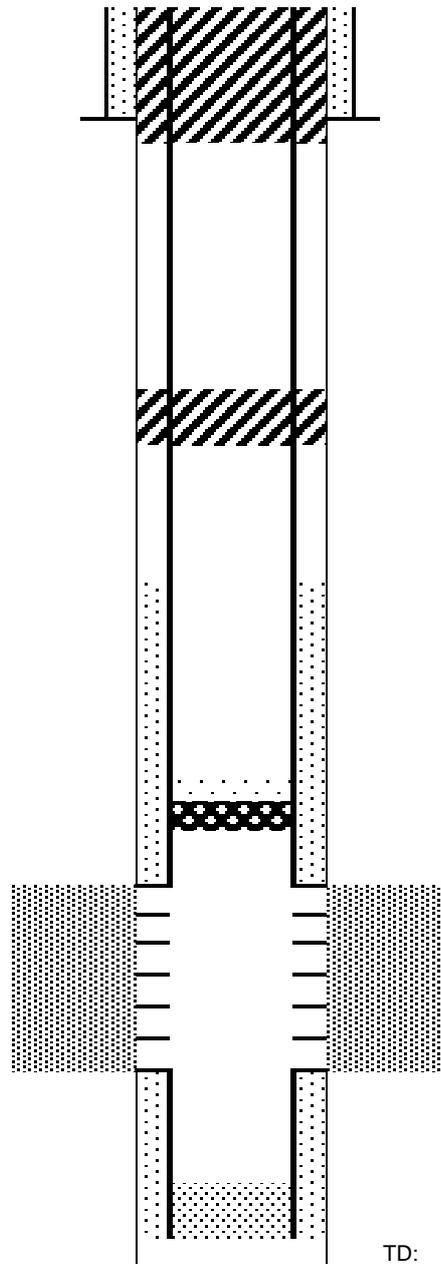

Cut surface casing off 6'-8' below surface.

Perforate at 825.0' (150 ft below deepest water well within 1 mile)
 Pump 380 Sxs
 Will bring cement to surface.

Deepest water well within 1 mile (675') + 150' : 825'
 Foxhills data (375') + 150' = 525'
 Casing shoe (458') + 100' : 558'

Perforate @ 2500'
 Set CICR @ 2400'
 Pump 95 sx courtesy plug, leaving 100' of cement above CR

No producing Sussex within 1 mile.

CIBP @ 6959' w/ 2 sx cement on top

Niobrara Perforations 7009' - 7144'

Codell Perforations 7283' - 7295'

TD: 7423'