

**NOBLE ENERGY INC.**  
 Goetzel 01-29  
 SWNE 29-6N-66W  
 1980' FNL & 1980' FEL  
 WELD COUNTY, CO  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 3/28/2016

API: 05-123-11325  
 COGCC #

GL Elev: 4727'  
 KB Elev: 4742'


**Spud Date:** 10/28/1983

**Surface Casing :**  
 8-5/8"; 24 ppf; unknown grade set at 432'  
 Cement: 385 sx  
 TOC: Surface

Remedial Cement Tops:  
**TOC @ 1647' - 2400'**  
**TOC @ 4430' - 4574'**

**Production Casing:**  
**TOC @ 5818'**  
**Nio Top 6823'**

**Production Casing :**  
 4-1/2"; 11.6 ppf; M-80 set at 4505.2'  
 Cement: 275 sx  
 TD: 11/4/1983

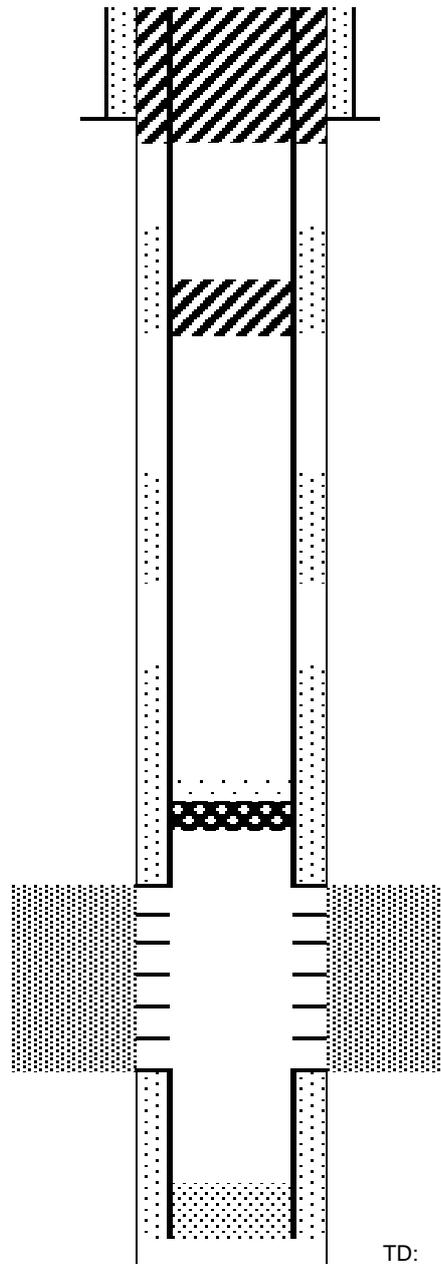

Cut surface casing off 6'-8' below surface.

**Pump approx 205 sx shoe plug @ 532'**  
**Will bring cement to surface.**  
 Deepest water well = 58' + 150' = 208'  
 Surface casing = 432' + 100' = 532'  
 Fox Hills = (316') + 150' = 466'

Pump 20 sx courtesy plug from 2400'- 2200'

No producing Sussex within 1 mile.

CIBP @ 6832' w/ 2 sx cement on top

Niobrara Perforations 6882' - 6898'

Codell Perforations 7074' - 7090'

TD: 7208'