

**NOBLE ENERGY INC.**  
**DANIELS K05-25**  
**SWSW 5-4N-66W**  
**1262 FSL & 1095 FWL**  
**WELD COUNTY, CO**  
**Wattenberg**  
**CURRENT WELLBORE SCHEMATIC**  
**with PROPOSED P&A**  
**3/9/2016**

API: 05-123-22203  
 COGCC #

GL Elev: 4699'  
 KB Elev: 4715'


Spud Date: 5/15/2004

**Surface Casing :**  
 8-5/8" 24# @ 415'  
 Cement: 160 sx  
 TOC: Surface

**TOC @ 4235'**

**Nio Top 6843'**

**Production Casing :**  
 4-1/2" 11.60# M-80 @ 7302'  
 Cement: 360 sx  
 TD Date: 5/21/2004

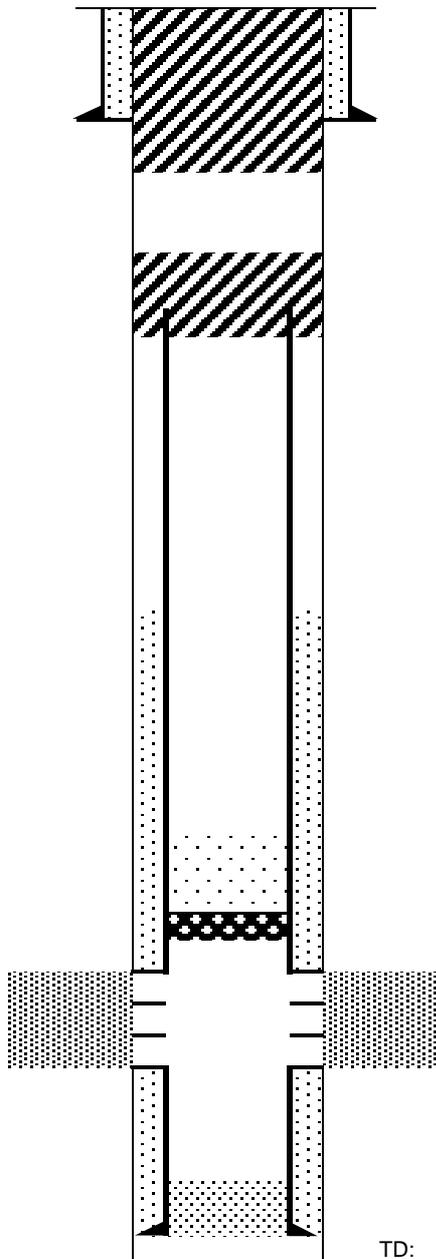

Cut surface casing off 6'-8' below surface.

Pump approx 165 sx shoe plug @ 515'  
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled  
 Cut and pull csg @ 2500'

CIBP @ 7112' w/ 30 sx cement on top

Codell Perforations 7162'-7179'

TD: 7332'