

NOBLE ENERGY INC.
 Spike State D36-06
 SENW 36-3N-64W
 1980 FNL & 1980 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 4/11/2016

API: 05-123-16131


KB Elev: 4846'
 GL Elev: 4833'

Spud Date: 9/14/1992

Surface Casing :
 8 5/8", 24# @ 650'
 Cement: 450 sx
 TOC: Surface

TOC @ 6150'

Production Casing :
 2 7/8", 6.5#, N-80 @ 7061'
 Cement: 200 sx
 Run Date: 9/19/1992

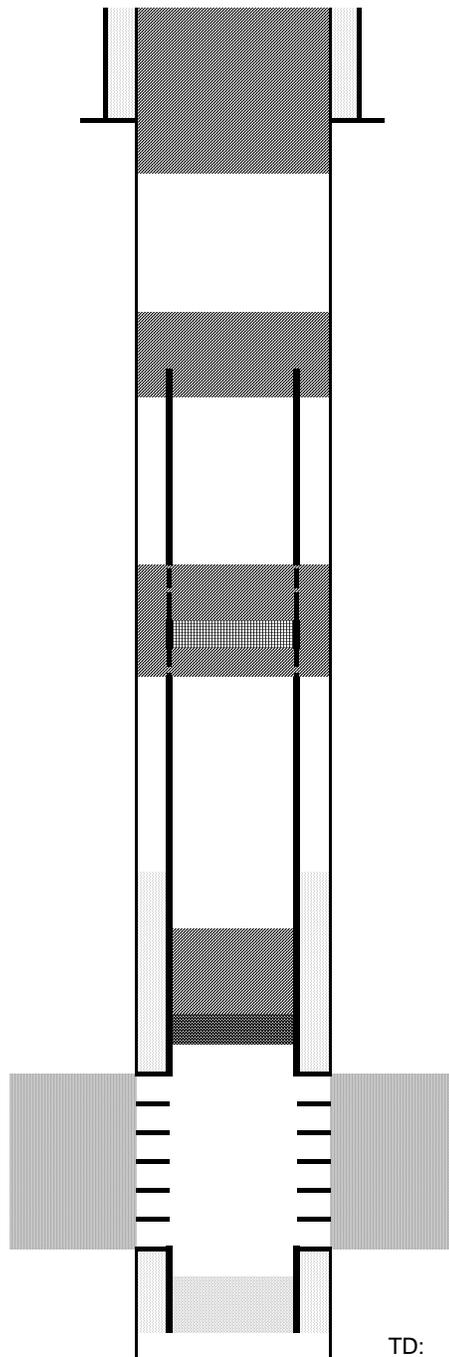

Cut surface casing off 6'-8' below surface.

Pump approx 310 sx shoe plug @ 858'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

Perforate 2 7/8" csg @ 4050'
 Pump 75 sx through and 5 sx on top
 Set CICR @ 4150'
 Perforate 2 7/8" csg @ 4250'

Pump 10 sx on top of CIBP to 6500' to cover Nio top.
 CIBP @ 6850'

Codell Perforations: 6900' - 6910'

TD: 7077'