

NOBLE ENERGY INC.
FOSS 06-42
NWSE 6-6N-63W
2175 FSL & 1777 FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
4/15/2016

API: 05-123-24288
COGCC #

GL Elev: 4696'
KB Elev: 4708'

Spud Date:

Surface Casing :


8-5/8" 24# @ 454'
Cement: 250
TOC: Surface

TOC @ 12'

Nio Top 6523'

Production Casing :

4-1/2" 11.6# M-80 @ 6982'
Cement: 1274
TD: 10/22/2008

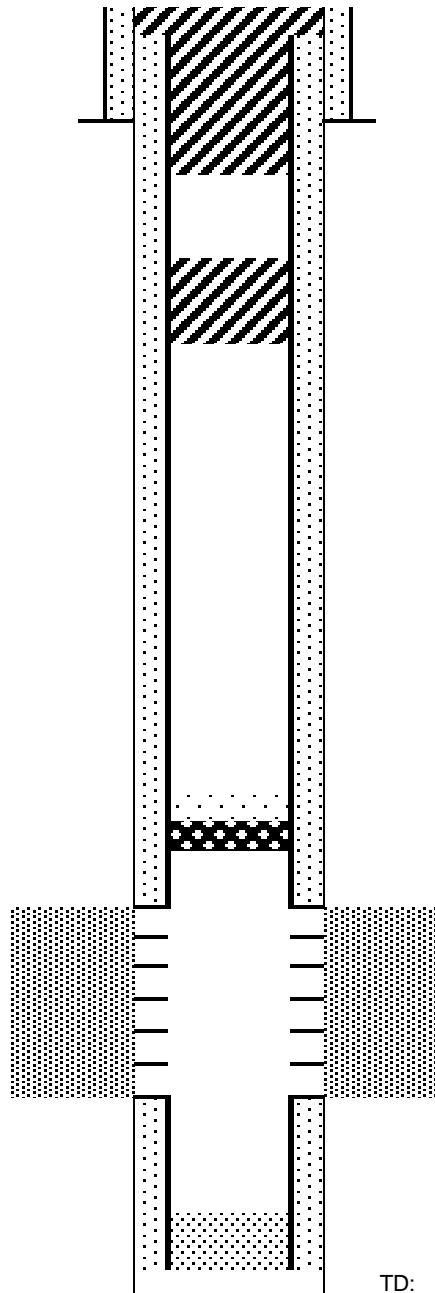

Cut surface casing off 6'-8' below surface.

Pump approx 183 sx shoe plug @ 554'
Will bring cement to surface.

Pump 15 sx courtesy plug @ 2500'

CIBP @ 6508' w/ 5 sx cement on top

Niobrara Perforations:
6558'-6575'; 6632'-6644'; 6660'-6692';
6726'-6742'

Codell Perforations: 6842'-6852'

TD: 6984'