

NOBLE ENERGY INC.
 FOSS 06-45
 SWSE 6-6N-63W
 1138 FSL & 1717 FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 4/18/2016

API: 05-123-24289
 COGCC #

GL Elev: 4695'
 KB Elev: 4711'


Spud Date:

Surface Casing :
 8-5/8" 24# @ 461'
 Cement: 260
 TOC: Surface

TOC @ 343'

Nio Top 6527'

Production Casing :
 4-1/2" 11.6# M-80 @ 6987'
 Cement: 1189
 TD: 10/14/2008

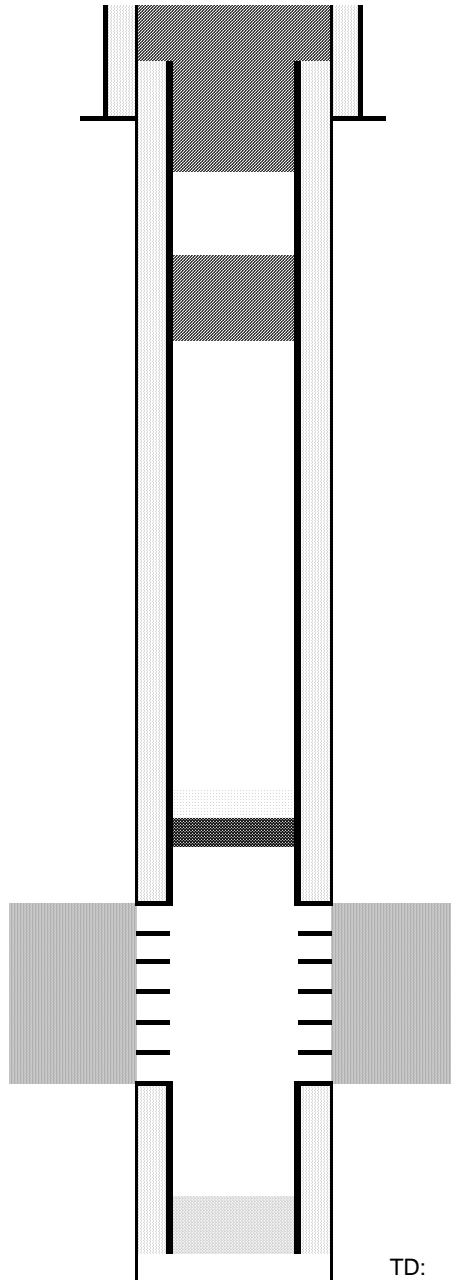

Cut surface casing off 6'-8' below surface.

Pump approx 185 sx shoe plug @ 561'
 Will bring cement to surface.

Pump 15 sx courtesy plug @ 2500'

CIBP @ 6512' w/ 5 sx cement on top

Niobrara Perforations:
 6562'-6580'; 6634'-6646'; 6666'-6694'; 6675'-
 6695'; 6724' - 6740'
Codell Perforations: 6842'-6852'

TD: 7023'