

NOBLE ENERGY INC.
ROTHE STATE B36-09
NESE 36-5N-64W
1956 FSL & 516 FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
4/20/2016

API: 05-123-19214
COGCC #


GL Elev: 4591'
KB Elev: 4601'

Spud Date: 9/29/1996

Surface Casing :
8 5/8 24# @ 404'
Cement: 280 SX
TOC: Surface

TOC @ 5900'

Production Casing :
3 1/2 7.7# M-75 @ 6797'
Cement: 160 SX
TD: 10/4/1996

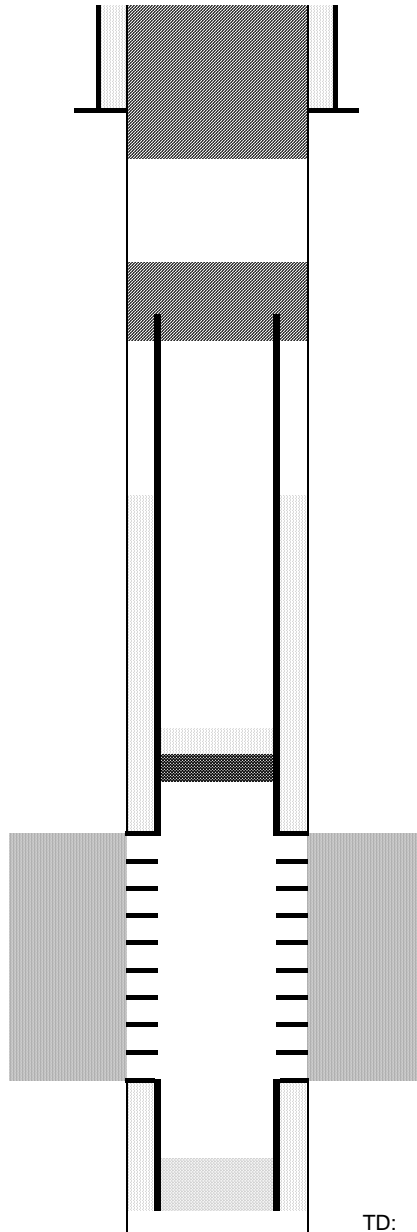

Cut surface casing off 6'-8' below surface.

Pump approx 225 sx shoe plug @ 525'
Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
Cut and pull csg @ 2500'

CIBP @ 6403' w/ 2 sx cement on top

Niobrara Perforations 6453' - 6466'

Codell Perforations 6638' - 6647'

TD: 6797'