

NOBLE ENERGY INC.
STINAR 14-01
SWNE 14-4N-64W
1980 FNL & 1980 FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
4/20/2016

API: 05-123-12409
COGCC #


GL Elev: 4640'
KB Elev: 4649'

Spud Date: 4/24/1985

Surface Casing :
8 5/8 24# @ 328'
Cement: 250 SX
TOC: Surface

TOC @ 6150'

Production Casing :
4 1/2 11.6# N-80 @ 6850'
Cement: 220 SX
TD: 5/2/1985

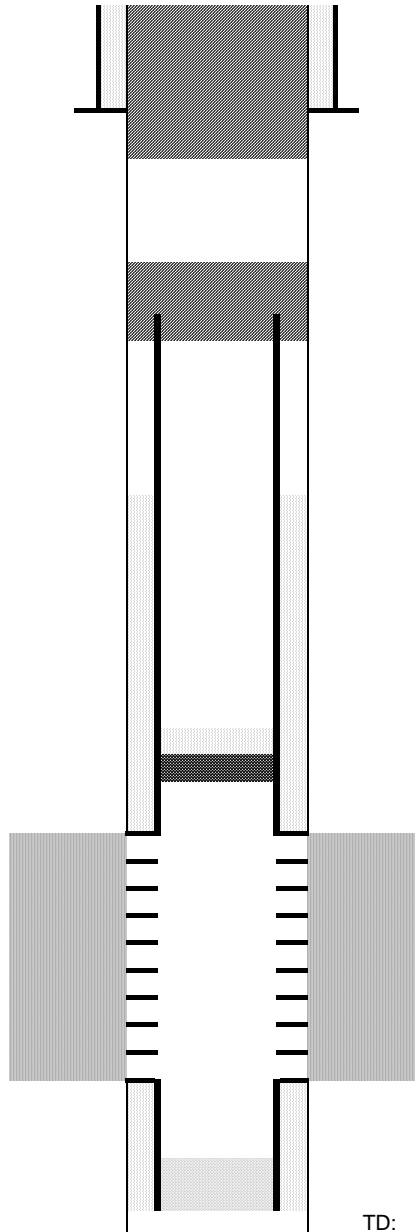

Cut surface casing off 6'-8' below surface.

Pump approx 175 sx shoe plug @ 450'
Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
Cut and pull csg @ 2500'

CIBP @ 6432' w/ 2 sx cement on top

Niobrara Perforations 6482' - 6649'

Codell Perforations 6738' - 6749'

TD: 6850'