

NOBLE ENERGY INC.
STINAR 14-02(1)
NWNE 14-4N-64W
469 FNL & 1974 FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
4/21/2016

API: 05-123-16991
COGCC #


GL Elev: 4635'
KB Elev: 4646'

Spud Date: 5/1/1993

Surface Casing :
8 5/8 23# M-50 @ 470'
Cement: 350 SX
TOC: Surface

TOC @ 5873'

Production Casing :
4 1/2 11.6# M-75 @ 6850'
Cement: 150 SX
TD: 5/6/1993

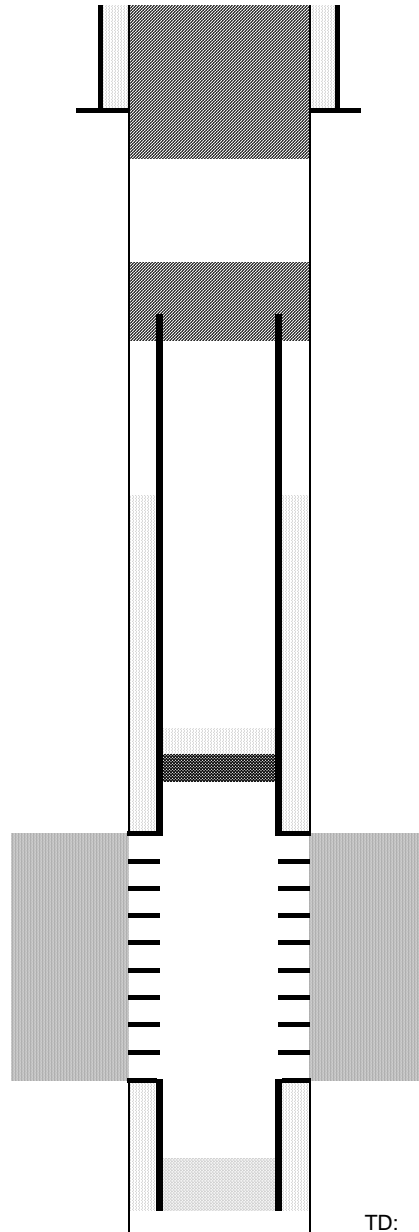

Cut surface casing off 6'-8' below surface.

Pump approx 250 sx shoe plug @ 600'
Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
Cut and pull csg @ 2500'

CIBP @ 6447' w/ 2 sx cement on top

Niobrara Perforations 6497' - 6680'

Codell Perforations 6745' - 6757'

TD: 6850'