

NOBLE ENERGY INC.
ROTHE STATE B36-15
SWSE 36-5N-64W
593 FSL & 1991 FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
4/20/2016

API: 05-123-19216
COGCC #


GL Elev: 4587'
KB Elev: 4597'

Spud Date: 10/21/1996

Surface Casing :
8 5/8 24# @ 360'
Cement: 300 SX
TOC: Surface

TOC @ 5904'

Production Casing :
3 1/2 7.7# M-75 @ 6812'
Cement: 145 SX
TD: 10/25/1996

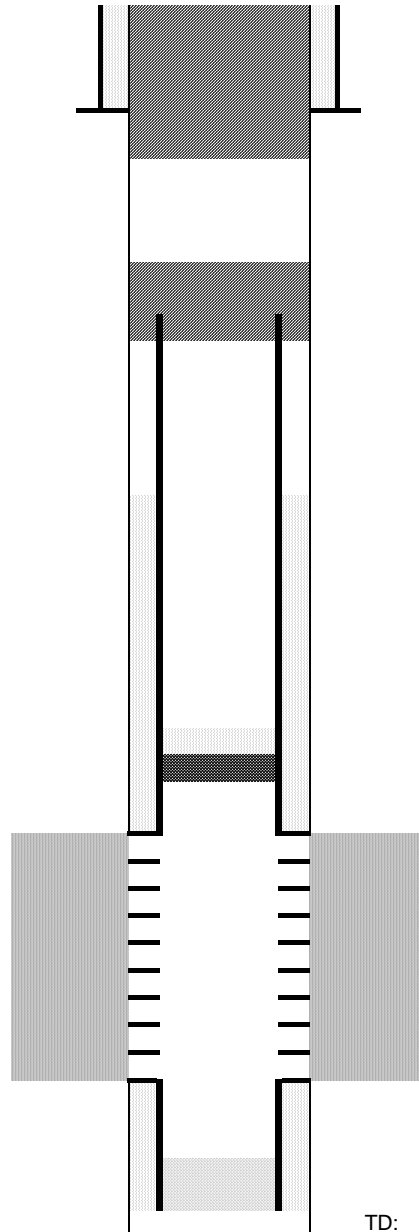

Cut surface casing off 6'-8' below surface.

Pump approx 200 sx shoe plug @ 475'
Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
Cut and pull csg @ 2500'

CIBP @ 6505' w/ 2 sx cement on top

Niobrara Perforations 6555' - 6562'

Codell Perforations 6637' - 6648'

TD: 6812'