

**NOBLE ENERGY INC.**  
WELLS RANCH USX AA27-02  
NWNE 27-6N-63W  
687 FNL & 1982 FEL  
WELD COUNTY, CO  
Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
with PROPOSED P&A  
4/25/2016

API: 05-123-25267  
COGCC #

GL Elev: 4792  
KB Elev: 4804

**Spud Date:**


**Surface Casing :**

8-5/8" 24# J-55 @ 432'  
Cement: 236  
TOC: Surface

TOC @ ~ 1344'

**Production Casing :**

4-1/2" 11.6# M-80 @ 6964'  
Cement: 940  
TD: 7/8/2007

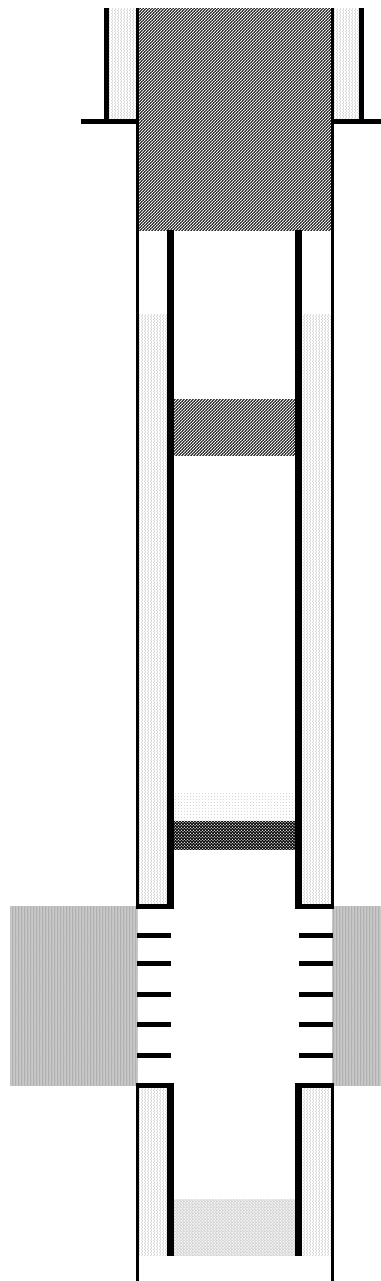

Add 10 sx plug at surface.  
Cut surface casing off 6'-8' below surface.

Pump 250 sx shoe/stub plug from 650' to surface

Pump approx. 20 sx balance plug @ 2500'

CIBP @ 6490' w/ 2 sx cement on top

Niobrara Perforations: 6540' - 6648'

Codell Perforations: 6806' - 6816'

TD: 6987