

NOBLE ENERGY INC.
WELLS RANCH AA21-08
SENE 21-6N-63W
2077 FNL & 735 FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
4/26/2016

API: 05-123-26816
COGCC #

GL Elev: 4718
KB Elev: 4731

Spud Date:


Surface Casing :

8-5/8" 24# J-55 @ 580'
Cement: 280
TOC: Surface

TOC @ ~ 1374'

Production Casing :

4-1/2" 11.6# M-80 @ 6924'
Cement: 740
TD: 7/21/2008

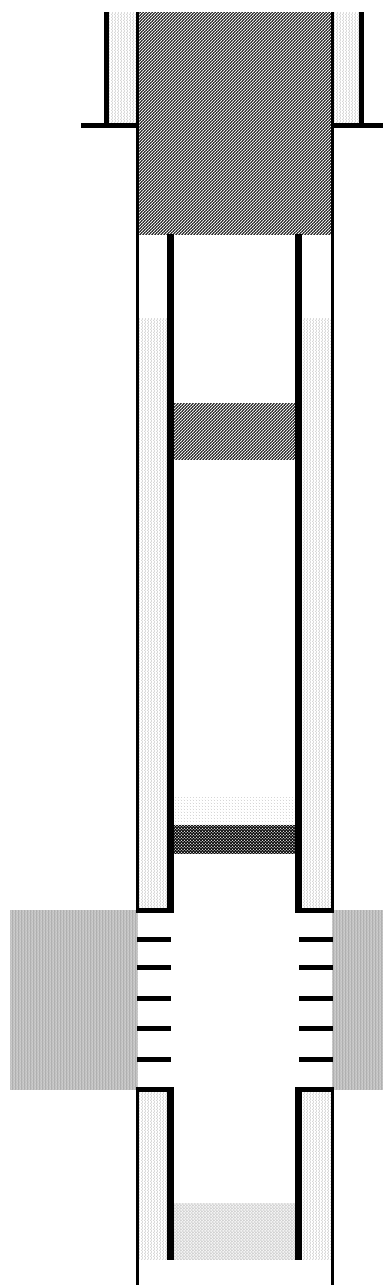

Add 10 sx plug at surface.
Cut surface casing off 6'-8' below surface.

Pump 250 sx shoe/stub plug from 680' to surface

Pump approx. 20 sx balance plug @ 2500'

CIBP @ 6517' w/ 2 sx cement on top

Niobrara Perforations: 6567' - 6587'

Codell Perforations: 6756' - 6767'

TD: 6925