

NOBLE ENERGY INC.
 STINAR 14-08
 SENE 14-4N-64W
 2000 FNL & 844 FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 4/26/2016

API: 05-123-16992
 COGCC #


GL Elev: 4639'
 KB Elev: 4650'

Spud Date: 5/6/1993

Surface Casing :
 8 5/8 23# M-50 @ 466'
 Cement: 485 SX
 TOC: Surface

TOC @ 5934'

Production Casing :
 4 1/2 11.6# M-75 @ 6882'
 Cement: 150 SX
 TD: 5/10/1993

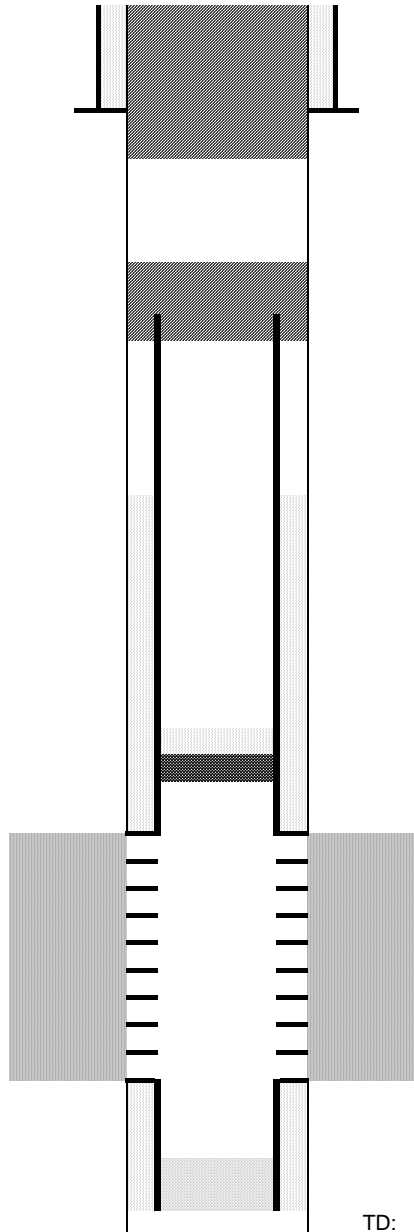

Cut surface casing off 6'-8' below surface.

Pump approx 225 sx shoe plug @ 575'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 6427' w/ 2 sx cement on top

Niobrara Perforations 6477' - 6608'

Codell Perforations 6725' - 6740'

TD: 6882'