

NOBLE ENERGY INC.
WELLS RANCH USX AA23-16
SESE 23-6N-63W
542 FSL & 757 FEL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
4/26/2016

API: 05-123-25802
COGCC #

GL Elev: 4819
KB Elev: 4832

Spud Date:


Surface Casing :

8-5/8" 24# J-55 @ 602'
Cement: 291
TOC: Surface

TOC @ ~ 1603'

Production Casing :

4-1/2" 11.6# M-80 @ 6952'
Cement: 700
TD: 5/27/2008

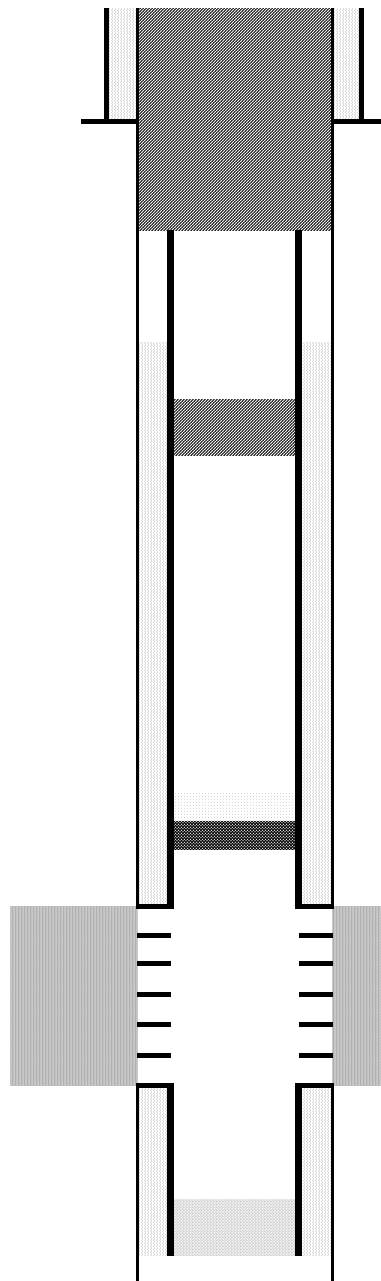

Add 10 sx plug at surface.
Cut surface casing off 6'-8' below surface.

Pump 250 sx shoe/stub plug from 710' to surface

Pump approx. 20 sx balance plug @ 2500'

CIBP @ 6476' w/ 2 sx cement on top

Niobrara Perforations: 6526' - 6637'

Codell Perforations: 6793' - 6803'

TD: 6954