

NOBLE ENERGY INC.
 STINAR C14-28D
 NWNE 14-4N-64W
 150 FSL & 2490 FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 4/26/2016

API: 05-123-32786
 COGCC #


GL Elev: 4639'
 KB Elev: 4650'

Spud Date: 11/13/2011

Surface Casing :
 8 5/8 24# J-55 @ 647'
 Cement: 196 SX
 TOC: Surface

TOC @ 880'

Production Casing :
 4 1/2 11.6# M-80 @ 7012'
 Cement: 610 SX
 TD: 11/17/2011

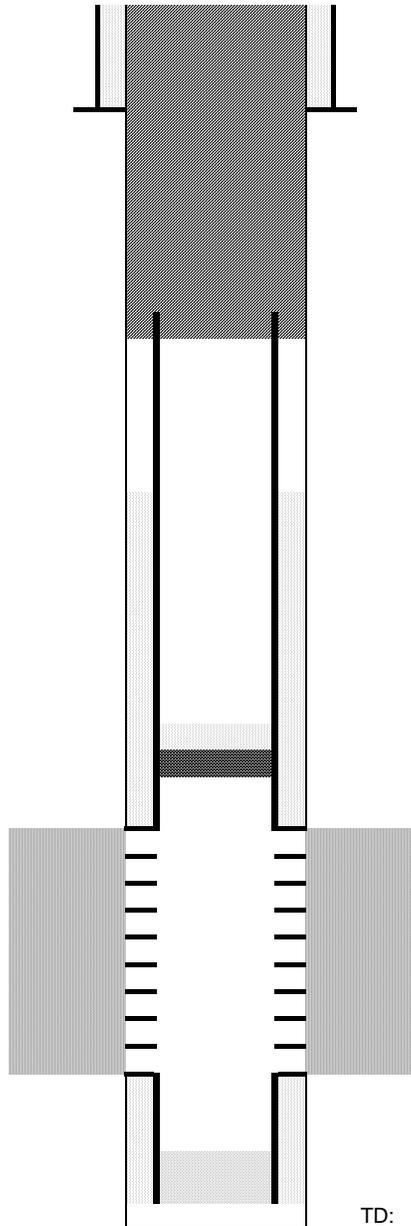

Cut surface casing off 6'-8' below surface.

Will bring cement to surface.

Pump 350 sx stub plug where csg was pulled
 Cut and pull csg @ 870'

CIBP @ 6617' w/ 2 sx cement on top

Niobrara Perforations 6667' - 6749'

Codell Perforations 6852' - 6864'

TD: 6882'