

NOBLE ENERGY INC.
WELLS RANCH USX AA23-25
SWSW 23-6N-63W
1216 FSL & 1318 FWL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
4/26/2016

API: 05-123-27347
COGCC #

GL Elev: 4806
KB Elev: 4818

Spud Date:


Surface Casing :

8-5/8" 24# J-55 @ 485'
Cement: 241
TOC: Surface

TOC @ ~ 2904'

Production Casing :

4-1/2" 11.6# M-80 @ 6978'
Cement: 860
TD: 4/27/2007

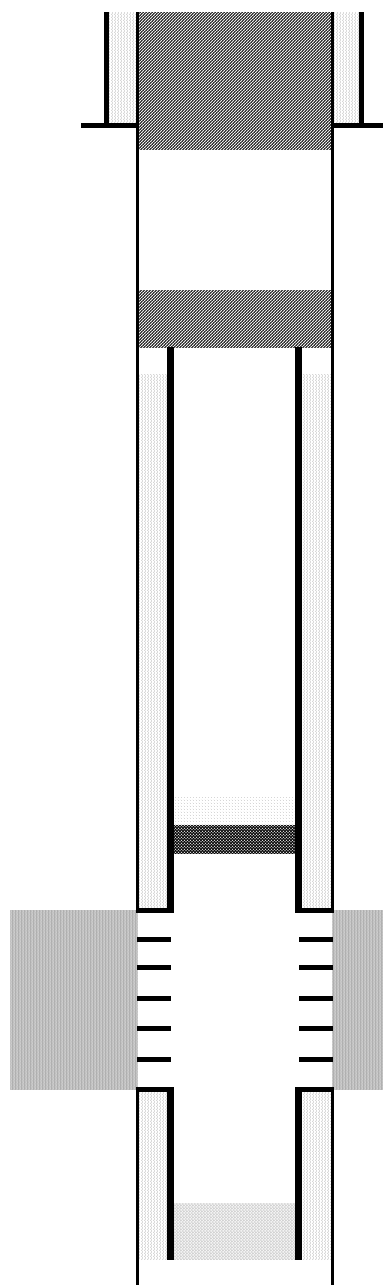

Add 10 sx plug at surface.
Cut surface casing off 6'-8' below surface.

Pump 210 sx shoe plug from 650' to surface

Pump approx. 100 sx stub plug @ 2500'

CIBP @ 6476' w/ 2 sx cement on top

Niobrara Perforations: 6526' - 6642'

Codell Perforations: 6802' - 6812'

TD: 6987