

NOBLE ENERGY INC.
MERCER C11-30D
SWSW 2-4N-64W
390 FSL & 245 FWL
WELD COUNTY, CO
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
4/27/2016

API: 05-123-30042
 COGCC #


GL Elev: 4624'
 KB Elev: 4640'

Spud Date: 1/30/2010

Surface Casing :
 8 5/8 32# J-55 @ 608'
 Cement: 271 SX
 TOC: Surface

TOC @ 2580'

Production Casing :
 4 1/2 11.6# N-80 @ 6957'
 Cement: 550 SX
 TD: 1/30/2010

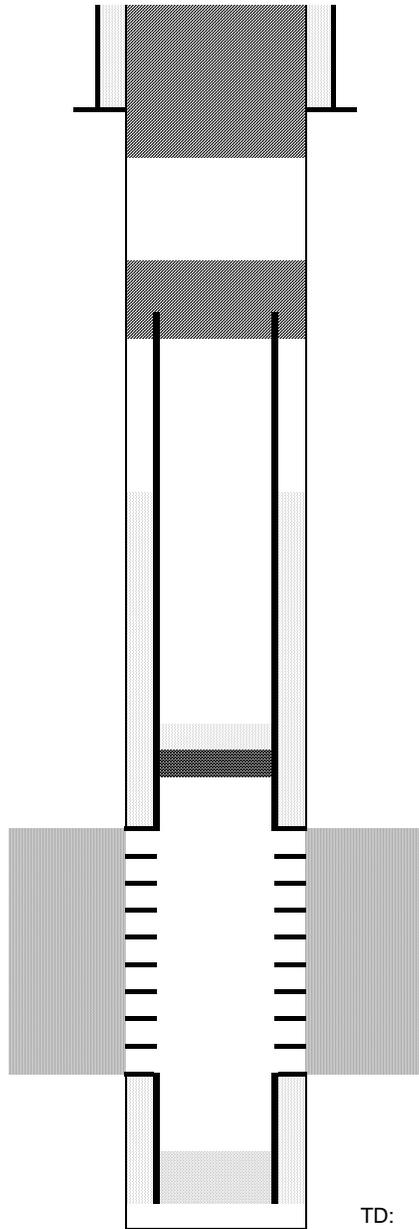

Cut surface casing off 6'-8' below surface.

Pump approx 300 sx shoe plug @ 725'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 6474' w/ 2 sx cement on top

Niobrara Perforations 6524' - 6688'

Codell Perforations 6800' - 6812'

TD: 6965'