

NOBLE ENERGY INC.
 GREENHEAD 32-18
 SWNE 18-4N-66W
 1850 FNL & 2120 FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 5/10/2016

API: 05-123-16797
 COGCC #

GL Elev: 4710'
 KB Elev: 4720'


Spud Date: 2/20/1993

Surface Casing :
 8-5/8" 24# @ 283'
 Cement: 250 sx
 TOC: Surface

TOC @ 6382'

Nio Top 6878'

Production Casing :
 4-1/2" 11.6# M-75 @ 7327'
 Cement: 230 sx
 TD Date: 2/26/1993

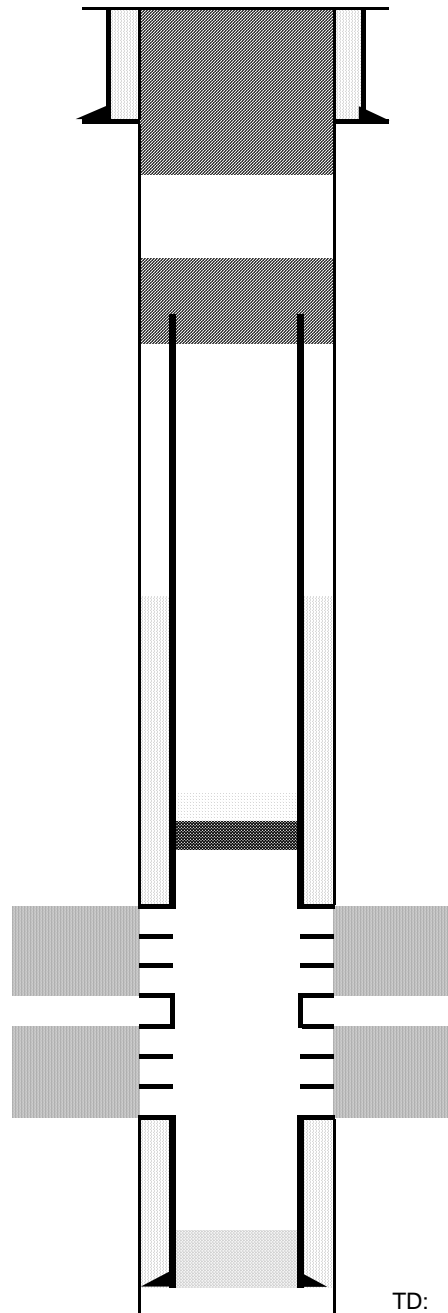

Cut surface casing off 6'-8' below surface.

Pump approx 225 sx shoe plug @ 710'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

No Sussex completions within 1 mile

CIBP @ 6845' w/ 2 sx cement on top

Niobrara Perforations 6895'-
 6915' and 7007'-7012'

Codell Perforations 7204'-7214'

TD: 7328'