

**NOBLE ENERGY INC.**  
 STROHAUER 18-21  
 NENW 18-6N-63W  
 848 FNL & 1645 FEL  
 WELD COUNTY, CO  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 5/11/2016

API: 05-123-23807  
 COGCC #

GL Elev: 4663'  
 KB Elev: 4675'


**Spud Date:**

**Surface Casing :**  
 8-5/8" 24# @ 454'  
 Cement: 220  
 TOC: Surface

**TOC @ 2366'**

**Nio Top 6481'**

**Production Casing :**  
 4-1/2" 11.6# M-80 @ 6930'  
 Cement: 655  
 TD: 4/19/2007

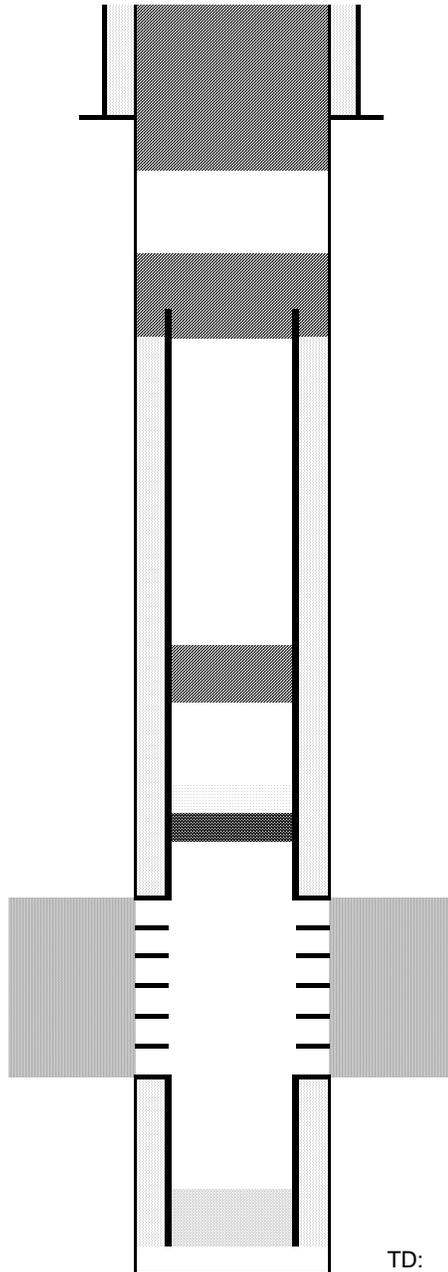

Cut surface casing off 6'-8' below surface.

Pump approx 217 sx shoe plug @ 554'  
 Will bring cement to surface.

Pump 125 sx stub plug where csg was pulled  
 (TOC ~2035')  
 Cut and pull csg @ 2360'

Pump 25 sx balance plug @ 6711'  
 (TOC ~6381')

CIBP @ 6749' w/ 2 sx cement on top

Codell Perforations: 6799'-6811'

TD: 7004'