

NOBLE ENERGY INC.
 BERNHARDT STATE 10-36
 NWSE 36-5N-67W
 1980 FSL & 1780 FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 5/11/2016

API: 05-123-21822
 COGCC #

GL Elev: 4877'
 KB Elev: 4893'


Spud Date: 12/13/2003

Surface Casing :
 8-5/8" 24# J-55 @ 671'
 Cement: 470 sx
 TOC: Surface

TOC @ 4290'

Nio Top 7031'

Production Casing :
 4-1/2" 11.6# I-80 @ 7515'
 Cement: 353 sx
 TD Date: 12/17/2003

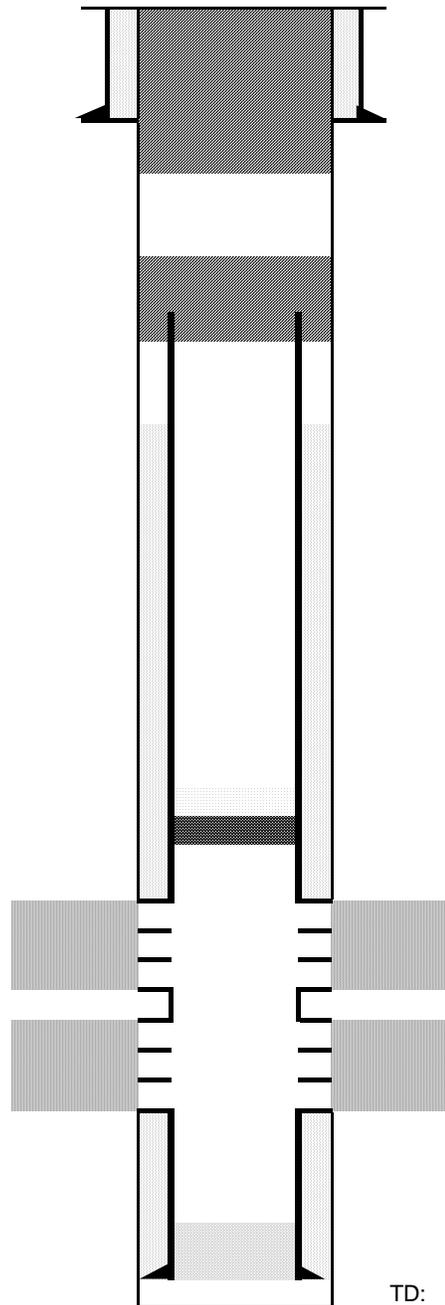

Cut surface casing off 6'-8' below surface.

Pump approx 245 sx shoe plug @ 771'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

No Sussex completions within 1 mile

CIBP @ 6996' w/ 2 sx cement on top

Niobrara Perforations 7046'-
 7066' and 7168'-7184'

Codell Perforations 7370'-7382'

TD: 7538'