

**NOBLE ENERGY INC.**  
 Cervi USX CC15-09  
 NESE 15-4N-63W  
 1980 FSL & 660 FEL  
 WELD COUNTY, CO  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 5/16/2016

API: 05-123-26005


KB Elev: 4688'  
 GL Elev: 4672'

Spud Date: 10/4/2007

**Surface Casing :**  
 8 5/8", 24#, J55 @ 483'  
 Cement: 233 sx  
 TOC: Surface

TOC @ 2052'

**Production Casing :**  
 4 1/2", 11.6#, M-80 @ 7451'  
 Cement: 780 sx  
 Run Date: 10/9/2007

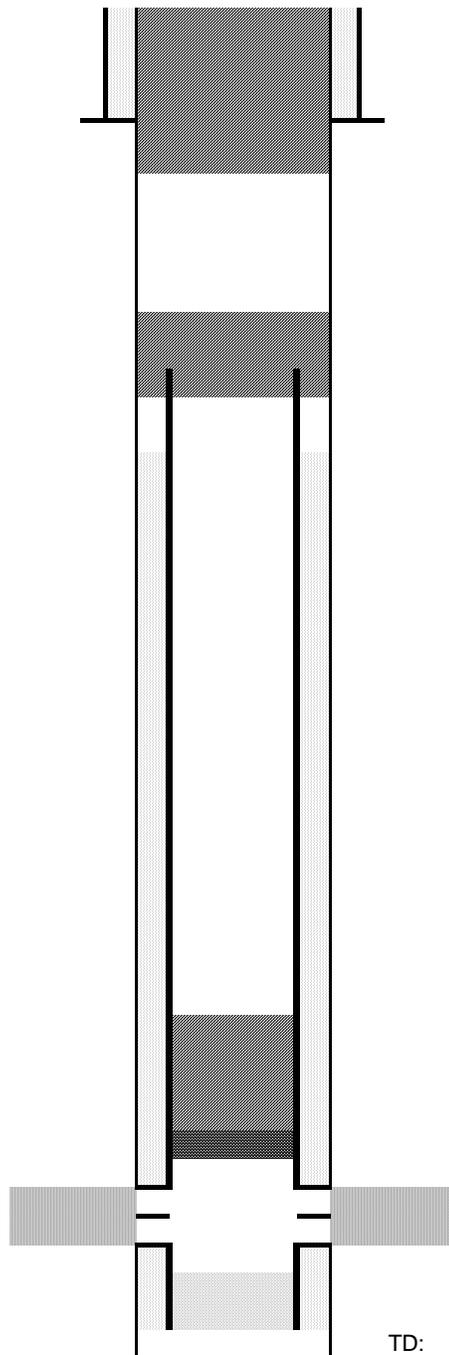

Cut surface casing off 6'-8' below surface.

Pump approx 205 sx shoe plug @ 583'  
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled  
 Cut and pull csg @ 2000'

Pump 85 sx balance plug from CIBP to 6190' to cover Niob  
 CIBP @ 7272'

Dakota Perforations: 7322' - 7338'

TD: 7451'

rara top