

NOBLE ENERGY INC.
 Cervi USX CC21-14
 SESW 21-4N-63W
 660 FSL & 1980 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 5/16/2016

API: 05-123-26038


KB Elev: 4815'
 GL Elev: 4799'

Spud Date: 10/16/2007

Surface Casing :
 8 5/8", 24#, J55 @ 600'
 Cement: 290 sx
 TOC: Surface

TOC @ 2230'

Production Casing :
 4 1/2", 11.6#, M-80 @ 7613'
 Cement: 880 sx
 Run Date: 10/22/2007

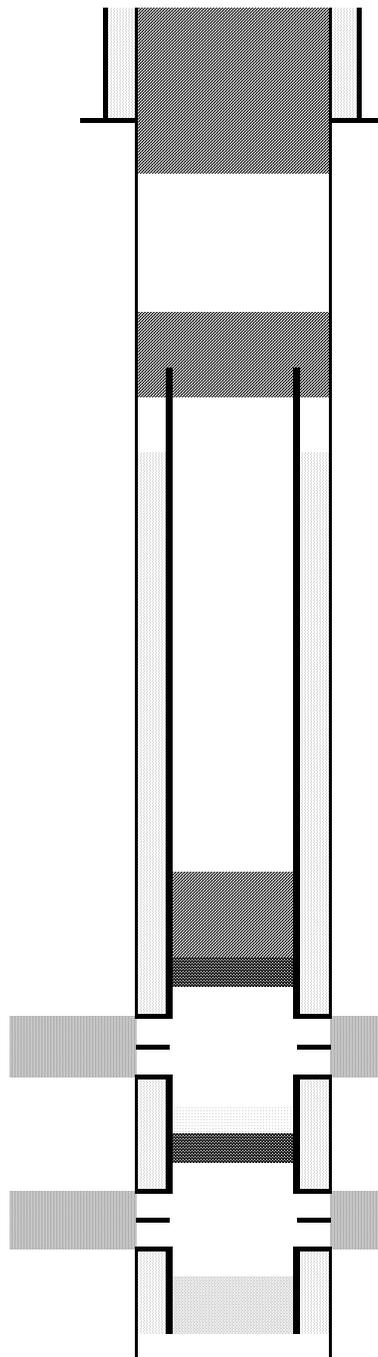

Cut surface casing off 6'-8' below surface.

Pump approx 245 sx shoe plug @ 700'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2200'

Pump 65 sx balance plug from CIBP to 6350' to cover Nio t
 CIBP @ 7177'

J Sand Perforations: 7227' - 7246'

CIBP @ 7460' (CURRENT)

Dakota Perforations: 7510' - 7550'

TD: 7630'

op