

# Bayswater Exploration & Production, LLC

Well Name: **Albrighton K-10HC**

Surface Location: Albrighton 10-P Pad Sec.10-T6N-R64W

North American Datum 1983, US State Plane 1983, Colorado Northern Zone

Ground Elevation: 4807.0

+N/-S +E/-W Northing Easting Latitude Longitude Slot

0.0 0.01425197.803266618.55 40.496613 -104.541313


RKB - 23' WELL @ 4830.0ft (RKB - 23')

## FINAL SURVEY

**Projected Bottom Hole Location**

**11751'MD 6993'TVD 3666'N & 1178'E of SHL**

**92.6 degree Incl @ 0.4 degree AZM**

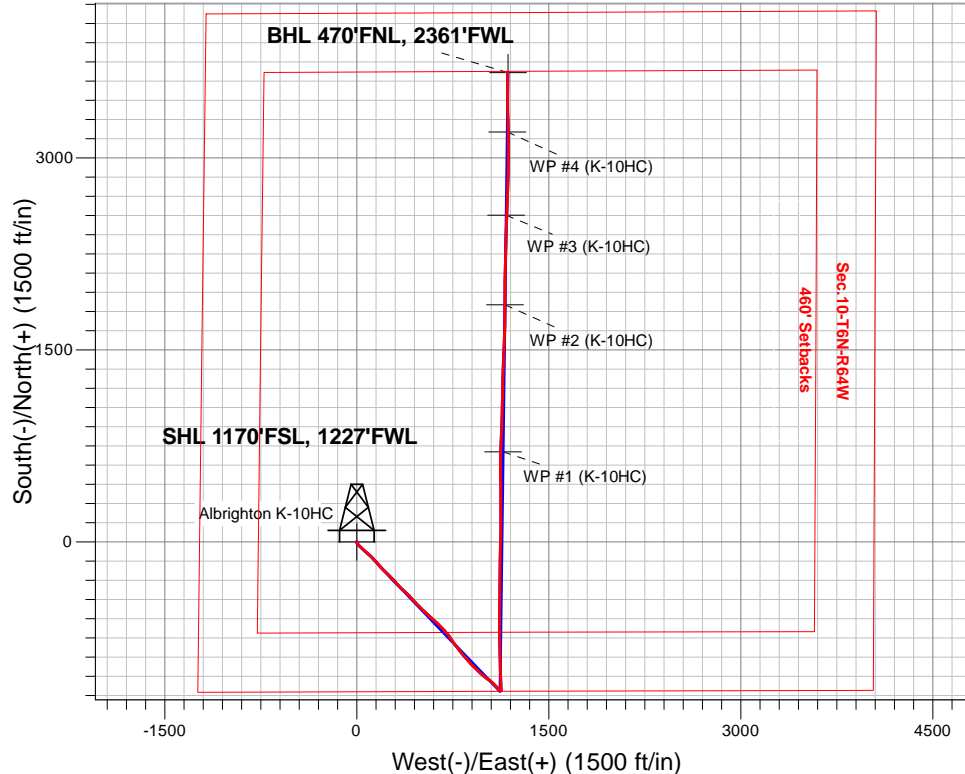


Albrighton 10-P Pad Sec.10-T6N-R64W  
Albrighton K-10HC  
Wellbore #1  
5:24, March 07 2016

### ANNOTATIONS

No annotation data is available.

### LEGEND

- ▲ Albrighton K-10HC, Wellbore #1, Plan #5 (3-01-16) V0
- Wellbore #1
- Survey #1

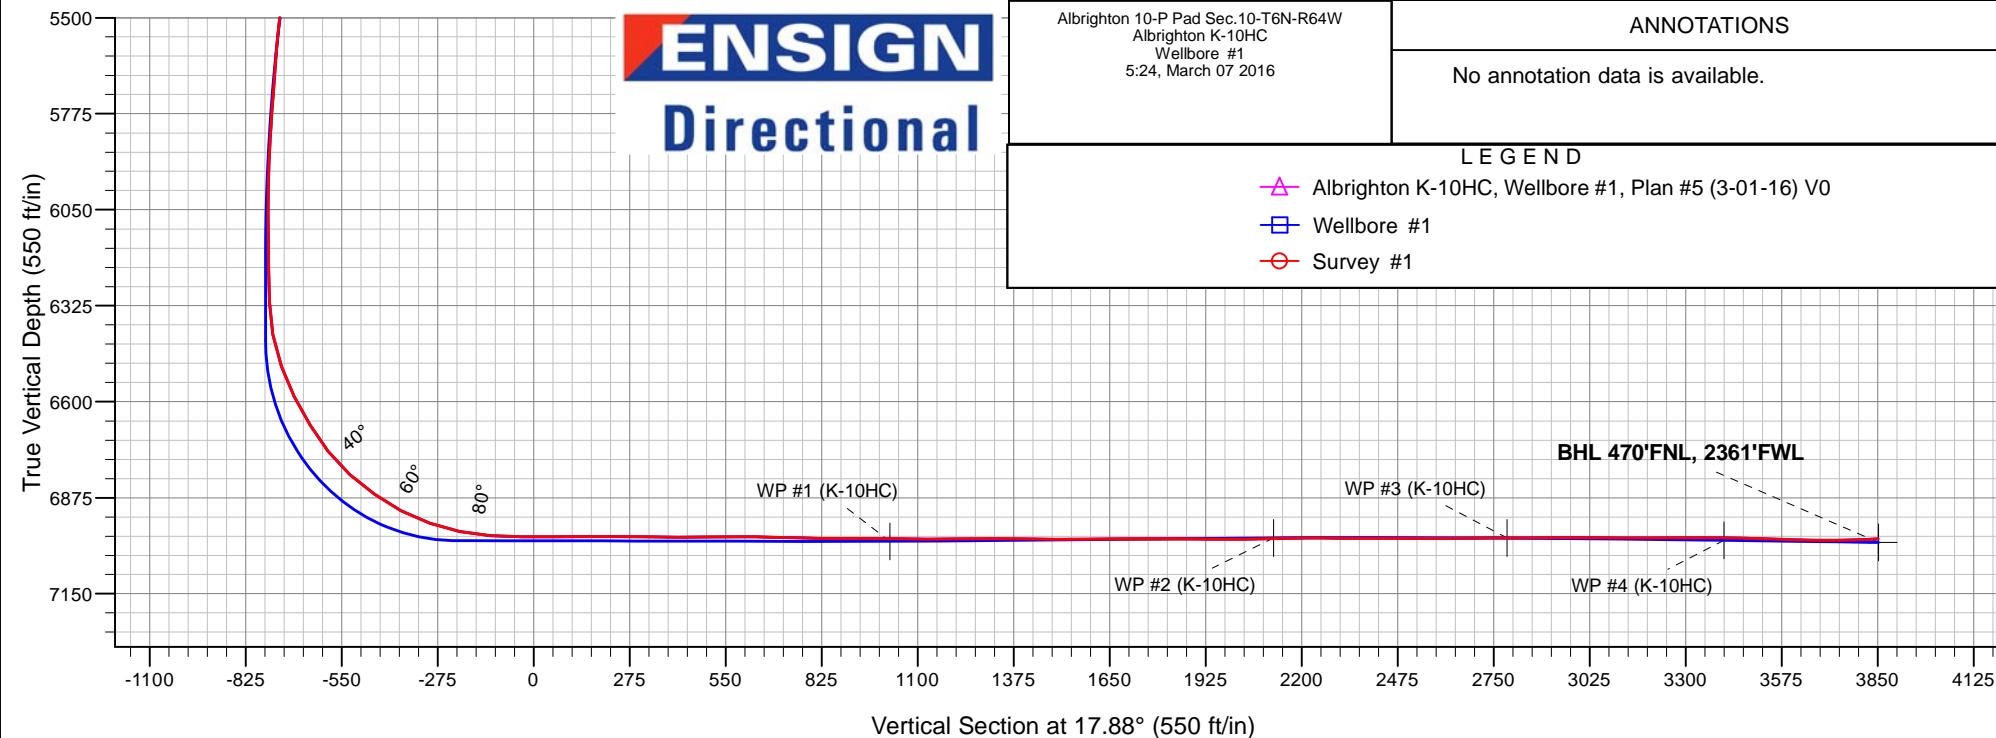



# **Bayswater Exploration & Production, LLC**

**SEC.10-T6N-R64W**

**Albrighton 10-P Pad Sec.10-T6N-R64W**

**Albrighton K-10HC**

**Wellbore #1**

**Survey: Survey #1**

## **Standard Survey Report**

**07 March, 2016**



<b>Company:</b>	Bayswater Exploration & Production, LLC	<b>Local Co-ordinate Reference:</b>	Well Albrighton K-10HC
<b>Project:</b>	SEC.10-T6N-R64W	<b>TVD Reference:</b>	WELL @ 4830.0ft (RKB - 23')
<b>Site:</b>	Albrighton 10-P Pad Sec.10-T6N-R64W	<b>MD Reference:</b>	WELL @ 4830.0ft (RKB - 23')
<b>Well:</b>	Albrighton K-10HC	<b>North Reference:</b>	True
<b>Wellbore:</b>	Wellbore #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Design:</b>	Wellbore #1	<b>Database:</b>	US_EDM

<b>Project</b>	SEC.10-T6N-R64W, Weld County, Colorado		
<b>Map System:</b>	US State Plane 1983	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	North American Datum 1983		Using Well Reference Point
<b>Map Zone:</b>	Colorado Northern Zone		Using geodetic scale factor

<b>Site</b>	Albrighton 10-P Pad Sec.10-T6N-R64W				
<b>Site Position:</b>		<b>Northing:</b>	1,425,196.03 usft	<b>Latitude:</b>	40.496612
<b>From:</b>	Lat/Long	<b>Easting:</b>	3,266,483.40 usft	<b>Longitude:</b>	-104.541799
<b>Position Uncertainty:</b>	0.0 ft	<b>Slot Radius:</b>	13-3/16 "	<b>Grid Convergence:</b>	0.62 °

<b>Well</b>	Albrighton K-10HC					
<b>Well Position</b>	<b>+N/-S</b>	0.0 ft	<b>Northing:</b>	1,425,197.80 usft	<b>Latitude:</b>	40.496613
	<b>+E/-W</b>	0.0 ft	<b>Easting:</b>	3,266,618.55 usft	<b>Longitude:</b>	-104.541313
<b>Position Uncertainty</b>		0.0 ft	<b>Wellhead Elevation:</b>	ft	<b>Ground Level:</b>	4,807.0 ft

<b>Wellbore</b>	Wellbore #1				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination (°)</b>	<b>Dip Angle (°)</b>	<b>Field Strength (nT)</b>
	IGRF2010	3/1/2016	8.11	67.00	52,708

<b>Design</b>	Wellbore #1				
<b>Audit Notes:</b>					
<b>Version:</b>	1.0	<b>Phase:</b>	ACTUAL	<b>Tie On Depth:</b>	0.0
<b>Vertical Section:</b>	<b>Depth From (TVD) (ft)</b>	<b>+N/-S (ft)</b>	<b>+E/-W (ft)</b>	<b>Direction (°)</b>	
	0.0	0.0	0.0	17.88	

<b>Survey Program</b>	<b>Date</b>	3/7/2016			
<b>From (ft)</b>	<b>To (ft)</b>	<b>Survey (Wellbore)</b>	<b>Tool Name</b>	<b>Description</b>	
125.0	11,751.0	Survey #1 (Wellbore #1)	MWD	MWD - Standard	

<b>Survey</b>										
<b>Measured Depth (ft)</b>	<b>Inclination (°)</b>	<b>Azimuth (°)</b>	<b>Vertical Depth (ft)</b>	<b>+N/-S (ft)</b>	<b>+E/-W (ft)</b>	<b>Vertical Section (ft)</b>	<b>Dogleg Rate (°/100usft)</b>	<b>Build Rate (°/100usft)</b>	<b>Turn Rate (°/100usft)</b>	
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00	
1.0	0.00	211.56	1.0	0.0	0.0	0.0	0.48	0.48	0.00	
<b>SHL 1170°FSL, 1227°FWL</b>										
125.0	0.60	211.56	125.0	-0.6	-0.3	-0.6	0.48	0.48	0.00	
219.0	1.18	163.71	219.0	-1.9	-0.3	-1.9	0.95	0.62	-50.90	
315.0	2.35	154.56	314.9	-4.6	0.8	-4.2	1.25	1.22	-9.53	
409.0	3.65	151.50	408.8	-9.0	3.0	-7.6	1.39	1.38	-3.26	
504.0	4.95	140.36	503.5	-14.8	7.1	-11.9	1.62	1.37	-11.73	
597.0	6.42	140.68	596.1	-21.9	13.0	-16.9	1.58	1.58	0.34	
692.0	8.20	136.89	690.3	-31.0	21.0	-23.1	1.94	1.87	-3.99	
786.0	10.44	135.17	783.1	-41.9	31.5	-30.2	2.40	2.38	-1.83	

<b>Company:</b>	Bayswater Exploration & Production, LLC	<b>Local Co-ordinate Reference:</b>	Well Albrighton K-10HC
<b>Project:</b>	SEC.10-T6N-R64W	<b>TVD Reference:</b>	WELL @ 4830.0ft (RKB - 23')
<b>Site:</b>	Albrighton 10-P Pad Sec.10-T6N-R64W	<b>MD Reference:</b>	WELL @ 4830.0ft (RKB - 23')
<b>Well:</b>	Albrighton K-10HC	<b>North Reference:</b>	True
<b>Wellbore:</b>	Wellbore #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Design:</b>	Wellbore #1	<b>Database:</b>	US_EDM

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
878.0	12.36	133.50	873.2	-54.6	44.6	-38.3	2.12	2.09	-1.82
973.0	13.68	132.49	965.8	-69.2	60.2	-47.4	1.41	1.39	-1.06
1,066.0	14.11	130.44	1,056.1	-84.0	77.0	-56.3	0.70	0.46	-2.20
1,161.0	14.76	132.00	1,148.1	-99.6	94.8	-65.7	0.80	0.68	1.64
1,256.0	14.96	133.17	1,239.9	-116.1	112.7	-75.9	0.38	0.21	1.23
1,350.0	15.25	135.33	1,330.7	-133.2	130.2	-86.8	0.67	0.31	2.30
1,445.0	16.56	136.56	1,422.0	-151.9	148.3	-99.0	1.42	1.38	1.29
1,507.0	16.76	138.38	1,481.4	-165.0	160.4	-107.8	0.90	0.32	2.94
1,589.0	16.10	141.00	1,560.1	-182.7	175.4	-120.0	1.21	-0.80	3.20
1,684.0	15.80	136.60	1,651.4	-202.3	192.5	-133.4	1.31	-0.32	-4.63
1,780.0	16.10	135.60	1,743.7	-221.3	210.8	-145.9	0.42	0.31	-1.04
1,875.0	16.70	132.70	1,834.8	-240.0	230.1	-157.8	1.07	0.63	-3.05
1,970.0	17.70	135.70	1,925.6	-259.6	250.2	-170.2	1.41	1.05	3.16
2,065.0	18.10	134.90	2,016.0	-280.3	270.7	-183.7	0.49	0.42	-0.84
2,161.0	17.90	135.70	2,107.3	-301.4	291.6	-197.3	0.33	-0.21	0.83
2,255.0	18.10	139.30	2,196.7	-322.8	311.2	-211.7	1.20	0.21	3.83
2,351.0	19.30	138.70	2,287.6	-346.0	331.4	-227.6	1.27	1.25	-0.63
2,446.0	19.20	132.90	2,377.3	-368.5	353.2	-242.2	2.01	-0.11	-6.11
2,541.0	18.50	131.20	2,467.2	-389.0	376.0	-254.8	0.94	-0.74	-1.79
2,636.0	18.50	131.20	2,557.3	-408.9	398.7	-266.8	0.00	0.00	0.00
2,731.0	18.20	138.00	2,647.5	-429.8	420.0	-280.2	2.27	-0.32	7.16
2,827.0	19.00	138.50	2,738.5	-452.7	440.3	-295.7	0.85	0.83	0.52
2,922.0	19.10	137.10	2,828.3	-475.6	461.2	-311.1	0.49	0.11	-1.47
3,017.0	19.60	132.90	2,917.9	-497.9	483.4	-325.4	1.56	0.53	-4.42
3,112.0	21.30	134.90	3,006.9	-520.9	507.3	-340.0	1.93	1.79	2.11
3,207.0	19.20	133.30	3,096.1	-543.8	530.9	-354.6	2.29	-2.21	-1.68
3,302.0	20.70	134.00	3,185.4	-566.2	554.4	-368.7	1.60	1.58	0.74
3,397.0	20.90	134.90	3,274.2	-589.8	578.4	-383.8	0.40	0.21	0.95
3,492.0	19.60	131.00	3,363.3	-612.2	602.5	-397.7	1.97	-1.37	-4.11
3,588.0	17.90	132.40	3,454.2	-632.7	625.5	-410.2	1.83	-1.77	1.46
3,683.0	16.60	133.50	3,544.9	-651.9	646.1	-422.1	1.41	-1.37	1.16
3,778.0	16.40	135.60	3,636.0	-670.8	665.4	-434.2	0.66	-0.21	2.21
3,874.0	16.40	134.70	3,728.1	-690.1	684.5	-446.6	0.26	0.00	-0.94
3,969.0	18.10	142.10	3,818.8	-711.1	703.1	-461.0	2.92	1.79	7.79
4,064.0	20.00	143.80	3,908.6	-735.9	721.7	-478.8	2.08	2.00	1.79
4,159.0	22.00	145.40	3,997.3	-763.7	741.4	-499.2	2.19	2.11	1.68
4,254.0	23.60	145.40	4,084.9	-794.0	762.4	-521.6	1.68	1.68	0.00
4,349.0	22.10	143.30	4,172.4	-823.9	783.8	-543.6	1.80	-1.58	-2.21
4,445.0	19.70	142.40	4,262.1	-851.3	804.5	-563.2	2.52	-2.50	-0.94
4,540.0	18.80	139.40	4,351.8	-875.6	824.2	-580.3	1.41	-0.95	-3.16
4,635.0	18.70	137.00	4,441.8	-898.3	844.6	-595.7	0.82	-0.11	-2.53
4,730.0	19.30	138.00	4,531.6	-921.1	865.5	-611.0	0.72	0.63	1.05
4,825.0	20.30	138.20	4,621.0	-945.1	887.0	-627.2	1.06	1.05	0.21

<b>Company:</b>	Bayswater Exploration & Production, LLC	<b>Local Co-ordinate Reference:</b>	Well Albrighton K-10HC
<b>Project:</b>	SEC.10-T6N-R64W	<b>TVD Reference:</b>	WELL @ 4830.0ft (RKB - 23')
<b>Site:</b>	Albrighton 10-P Pad Sec.10-T6N-R64W	<b>MD Reference:</b>	WELL @ 4830.0ft (RKB - 23')
<b>Well:</b>	Albrighton K-10HC	<b>North Reference:</b>	True
<b>Wellbore:</b>	Wellbore #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Design:</b>	Wellbore #1	<b>Database:</b>	US_EDM

Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
4,921.0	20.20	136.60	4,711.0	-969.5	909.5	-643.5	0.59	-0.10	-1.67	
5,016.0	17.10	137.10	4,801.0	-991.7	930.2	-658.3	3.27	-3.26	0.53	
5,113.0	17.00	132.40	4,893.8	-1,011.7	950.4	-671.1	1.42	-0.10	-4.85	
5,207.0	15.40	131.70	4,984.1	-1,029.3	969.9	-681.8	1.71	-1.70	-0.74	
5,302.0	16.00	128.20	5,075.5	-1,045.8	989.6	-691.5	1.18	0.63	-3.68	
5,397.0	17.00	128.40	5,166.6	-1,062.5	1,010.8	-700.9	1.05	1.05	0.21	
5,492.0	12.80	120.80	5,258.4	-1,076.5	1,030.7	-708.1	4.87	-4.42	-8.00	
5,585.0	13.20	129.20	5,349.0	-1,088.5	1,047.8	-714.3	2.07	0.43	9.03	
5,680.0	11.40	134.00	5,441.8	-1,101.9	1,062.9	-722.4	2.18	-1.89	5.05	
5,773.0	12.30	136.80	5,532.8	-1,115.5	1,076.3	-731.2	1.15	0.97	3.01	
5,866.0	9.40	134.00	5,624.2	-1,128.0	1,088.6	-739.4	3.17	-3.12	-3.01	
5,961.0	9.20	137.50	5,717.9	-1,139.0	1,099.3	-746.5	0.63	-0.21	3.68	
6,054.0	6.20	138.90	5,810.1	-1,148.2	1,107.6	-752.8	3.23	-3.23	1.51	
6,149.0	5.50	141.20	5,904.6	-1,155.6	1,113.8	-757.9	0.78	-0.74	2.42	
6,243.0	3.40	120.10	5,998.3	-1,160.6	1,119.1	-761.0	2.80	-2.23	-22.45	
6,338.0	2.60	94.60	6,093.2	-1,162.1	1,123.7	-761.1	1.62	-0.84	-26.84	
6,463.0	1.10	58.20	6,218.1	-1,161.7	1,127.5	-759.5	1.47	-1.20	-29.12	
6,558.0	1.30	8.10	6,313.1	-1,160.2	1,128.4	-757.8	1.09	0.21	-52.74	
6,653.0	12.00	356.20	6,407.3	-1,149.2	1,127.9	-747.5	11.30	11.26	-12.53	
6,748.0	20.40	358.10	6,498.5	-1,122.8	1,126.7	-722.7	8.86	8.84	2.00	
6,842.0	27.80	358.30	6,584.2	-1,084.4	1,125.5	-686.6	7.87	7.87	0.21	
6,937.0	32.90	359.90	6,666.2	-1,036.5	1,124.8	-641.1	5.44	5.37	1.68	
7,030.0	39.00	356.70	6,741.4	-981.9	1,123.1	-589.8	6.86	6.56	-3.44	
7,125.0	50.60	357.90	6,808.7	-915.2	1,120.0	-527.2	12.24	12.21	1.26	
7,219.0	55.70	359.00	6,865.1	-840.0	1,118.0	-456.3	5.51	5.43	1.17	
7,312.0	63.20	358.80	6,912.3	-760.0	1,116.5	-377.2	4.44	4.37	0.87	
7,406.0	72.10	0.20	6,948.0	-673.2	1,115.7	-298.1	3.37	3.30	0.57	
7,492.3	78.23	0.20	6,970.1	-589.8	1,116.0	-218.7	7.10	7.10	0.00	
<b>LPL 570'FSL, 2363'FWL</b>										
7,499.0	78.70	0.20	6,971.5	-583.2	1,116.1	-212.5	7.10	7.10	0.00	
7,592.0	86.40	0.70	6,983.5	-491.1	1,116.8	-124.5	8.30	8.28	0.54	
7,686.0	89.50	0.40	6,986.9	-397.1	1,117.7	-34.9	3.31	3.30	-0.32	
7,781.0	90.60	0.60	6,986.8	-302.2	1,118.5	55.8	1.18	1.16	0.21	
7,873.0	89.90	0.90	6,986.4	-210.2	1,119.7	143.7	0.83	-0.76	0.33	
7,968.0	90.00	1.60	6,986.5	-115.2	1,121.8	234.7	0.74	0.11	0.74	
8,062.0	89.60	1.10	6,986.8	-21.2	1,124.0	324.9	0.68	-0.43	-0.53	
8,154.0	89.20	0.40	6,987.8	70.8	1,125.2	412.8	0.88	-0.43	-0.76	
8,247.0	90.90	359.50	6,987.7	163.8	1,125.1	501.2	2.07	1.83	-0.97	
8,341.0	90.10	0.40	6,986.9	257.8	1,125.0	590.7	1.28	-0.85	0.96	
8,435.0	88.70	359.90	6,987.8	351.8	1,125.3	680.2	1.58	-1.49	-0.53	
8,529.0	88.40	359.90	6,990.2	445.7	1,125.1	769.6	0.32	-0.32	0.00	
8,622.0	89.70	359.30	6,991.8	538.7	1,124.5	857.9	1.54	1.40	-0.65	
8,716.0	90.00	0.40	6,992.0	632.7	1,124.2	947.3	1.21	0.32	1.17	

**Planned TPZ @ 7377', 470' FSL, 2343' FWL**

<b>Company:</b>	Bayswater Exploration & Production, LLC	<b>Local Co-ordinate Reference:</b>	Well Albrighton K-10HC
<b>Project:</b>	SEC.10-T6N-R64W	<b>TVD Reference:</b>	WELL @ 4830.0ft (RKB - 23')
<b>Site:</b>	Albrighton 10-P Pad Sec.10-T6N-R64W	<b>MD Reference:</b>	WELL @ 4830.0ft (RKB - 23')
<b>Well:</b>	Albrighton K-10HC	<b>North Reference:</b>	True
<b>Wellbore:</b>	Wellbore #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Design:</b>	Wellbore #1	<b>Database:</b>	US_EDM

Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
8,786.5	89.62	1.08	6,992.2	703.2	1,125.1	1,014.7	1.10	-0.53	0.96	
<b>WP #1 (K-10HC)</b>										
8,810.0	89.50	1.30	6,992.4	726.7	1,125.6	1,037.1	1.10	-0.53	0.96	
8,904.0	89.30	2.50	6,993.4	820.6	1,128.7	1,127.5	1.29	-0.21	1.28	
8,999.0	91.10	2.70	6,993.1	915.5	1,133.1	1,219.1	1.91	1.89	0.21	
9,095.0	89.70	2.00	6,992.4	1,011.4	1,137.0	1,311.6	1.63	-1.46	-0.73	
9,189.0	89.30	0.70	6,993.2	1,105.4	1,139.2	1,401.7	1.45	-0.43	-1.38	
9,284.0	89.70	0.40	6,994.0	1,200.4	1,140.1	1,492.4	0.53	0.42	-0.32	
9,379.0	90.70	2.00	6,993.7	1,295.4	1,142.1	1,583.4	1.99	1.05	1.68	
9,473.0	90.00	2.50	6,993.1	1,389.3	1,145.8	1,674.0	0.92	-0.74	0.53	
9,567.0	90.10	2.50	6,993.1	1,483.2	1,149.9	1,764.6	0.11	0.11	0.00	
9,661.0	89.80	2.00	6,993.1	1,577.1	1,153.6	1,855.1	0.62	-0.32	-0.53	
9,756.0	90.00	1.40	6,993.3	1,672.1	1,156.4	1,946.4	0.67	0.21	-0.63	
9,849.0	89.90	0.20	6,993.4	1,765.1	1,157.7	2,035.3	1.29	-0.11	-1.29	
9,936.8	91.75	0.20	6,992.1	1,852.8	1,158.0	2,118.9	2.11	2.11	0.00	
<b>WP #2 (K-10HC)</b>										
9,944.0	91.90	0.20	6,991.9	1,860.1	1,158.0	2,125.7	2.11	2.11	0.00	
10,038.0	90.20	0.00	6,990.2	1,954.1	1,158.2	2,215.2	1.82	-1.81	-0.21	
10,133.0	89.00	0.20	6,990.8	2,049.0	1,158.4	2,305.7	1.28	-1.26	0.21	
10,226.0	90.80	0.90	6,991.0	2,142.0	1,159.3	2,394.5	2.08	1.94	0.75	
10,320.0	89.70	1.60	6,990.6	2,236.0	1,161.3	2,484.5	1.39	-1.17	0.74	
10,413.0	89.40	2.70	6,991.3	2,328.9	1,164.8	2,574.1	1.23	-0.32	1.18	
10,506.0	91.20	2.50	6,990.8	2,421.8	1,169.0	2,663.8	1.95	1.94	-0.22	
10,599.0	89.30	2.30	6,990.4	2,514.8	1,172.9	2,753.4	2.05	-2.04	-0.22	
10,636.7	90.02	2.46	6,990.6	2,552.4	1,174.5	2,789.7	1.96	1.91	0.43	
<b>WP #3 (K-10HC)</b>										
10,693.0	91.10	2.70	6,990.1	2,608.7	1,177.0	2,844.0	1.96	1.91	0.43	
10,786.0	90.20	1.40	6,989.0	2,701.6	1,180.3	2,933.5	1.70	-0.97	-1.40	
10,880.0	89.70	1.40	6,989.1	2,795.6	1,182.6	3,023.6	0.53	-0.53	0.00	
10,975.0	88.90	0.00	6,990.3	2,890.5	1,183.8	3,114.4	1.70	-0.84	-1.47	
11,068.0	91.10	1.10	6,990.3	2,983.5	1,184.7	3,203.2	2.64	2.37	1.18	
11,162.0	89.70	0.00	6,989.6	3,077.5	1,185.6	3,292.9	1.89	-1.49	-1.17	
11,257.0	90.00	358.60	6,989.9	3,172.5	1,184.4	3,382.9	1.51	0.32	-1.47	
11,287.4	89.55	358.37	6,990.0	3,202.9	1,183.6	3,411.6	1.67	-1.49	-0.74	
<b>WP #4 (K-10HC)</b>										
11,351.0	88.60	357.90	6,991.0	3,266.5	1,181.6	3,471.5	1.67	-1.49	-0.74	
11,444.0	88.50	359.30	6,993.4	3,359.4	1,179.3	3,559.2	1.51	-0.11	1.51	
11,538.0	88.20	359.50	6,996.1	3,453.4	1,178.3	3,648.3	0.38	-0.32	0.21	
11,632.0	90.70	0.00	6,997.0	3,547.3	1,177.9	3,737.7	2.71	2.66	0.53	
11,703.0	92.60	0.40	6,994.9	3,618.3	1,178.1	3,805.3	2.73	2.68	0.56	
11,750.2	92.60	0.40	6,992.8	3,665.4	1,178.5	3,850.2	0.00	0.00	0.00	
<b>BHL 470'FNL, 2365'FWL</b>										
11,751.0	92.60	0.40	6,992.8	3,666.3	1,178.5	3,851.0	0.00	0.00	0.00	

<b>Company:</b>	Bayswater Exploration & Production, LLC	<b>Local Co-ordinate Reference:</b>	Well Albrighton K-10HC
<b>Project:</b>	SEC.10-T6N-R64W	<b>TVD Reference:</b>	WELL @ 4830.0ft (RKB - 23')
<b>Site:</b>	Albrighton 10-P Pad Sec.10-T6N-R64W	<b>MD Reference:</b>	WELL @ 4830.0ft (RKB - 23')
<b>Well:</b>	Albrighton K-10HC	<b>North Reference:</b>	True
<b>Wellbore:</b>	Wellbore #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Design:</b>	Wellbore #1	<b>Database:</b>	US_EDM

Design Targets										
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
SHL 1170'FSL, 1227'FW - survey misses target center by 0.1ft at 1.0ft MD (1.0 TVD, 0.0 N, 0.0 E) - Point	0.00	0.00	1.0	0.1	0.0	1,425,197.85	3,266,618.55	40.496613	-104.541313	
WP #3 (K-10HC) - survey misses target center by 6.4ft at 10636.7ft MD (6990.6 TVD, 2552.4 N, 1174.5 E) - Point	0.00	0.00	6,990.0	2,552.7	1,168.1	1,427,762.89	3,267,758.95	40.503620	-104.537113	
WP #2 (K-10HC) - survey misses target center by 2.4ft at 9936.8ft MD (6992.1 TVD, 1852.9 N, 1158.0 E) - Point	0.00	0.00	6,990.0	1,852.8	1,159.1	1,427,062.96	3,267,757.51	40.501699	-104.537145	
WP #4 (K-10HC) - survey misses target center by 10.0ft at 11287.3ft MD (6990.0 TVD, 3202.8 N, 1183.6 E) - Point	0.00	0.00	6,997.0	3,202.6	1,176.5	1,428,412.82	3,267,760.32	40.505404	-104.537083	
WP #1 (K-10HC) - survey misses target center by 20.7ft at 8786.7ft MD (6992.2 TVD, 703.4 N, 1125.1 E) - Point	0.00	0.00	7,000.0	702.9	1,144.3	1,425,913.00	3,267,755.15	40.498542	-104.537199	
BHL 470'FNL, 2365'FWL - survey misses target center by 10.9ft at 11750.2ft MD (6992.8 TVD, 3665.4 N, 1178.5 E) - Point	0.00	0.00	7,003.0	3,665.9	1,182.4	1,428,876.09	3,267,761.22	40.506675	-104.537061	

Checked By: \_\_\_\_\_ Approved By: \_\_\_\_\_ Date: \_\_\_\_\_