

NOBLE ENERGY INC.
 DYER USX AB35-13
 SWSW 35-7N-64W
 660 FSL & 660 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 5/17/2016

API: 05-123-24547
 COGCC #

GL Elev: 4824'
 KB Elev: 4836'

Spud Date: 1/9/2007

Surface Casing :


8-5/8" 24# J-55 @ 896'
 Cement: 730
 TOC: Surface

TOC @ 3208'

Nio Top 6790'

Production Casing :

4-1/2" 11.6# M-80 @ 7221'
 Cement: 730
 TD: 1/14/2007

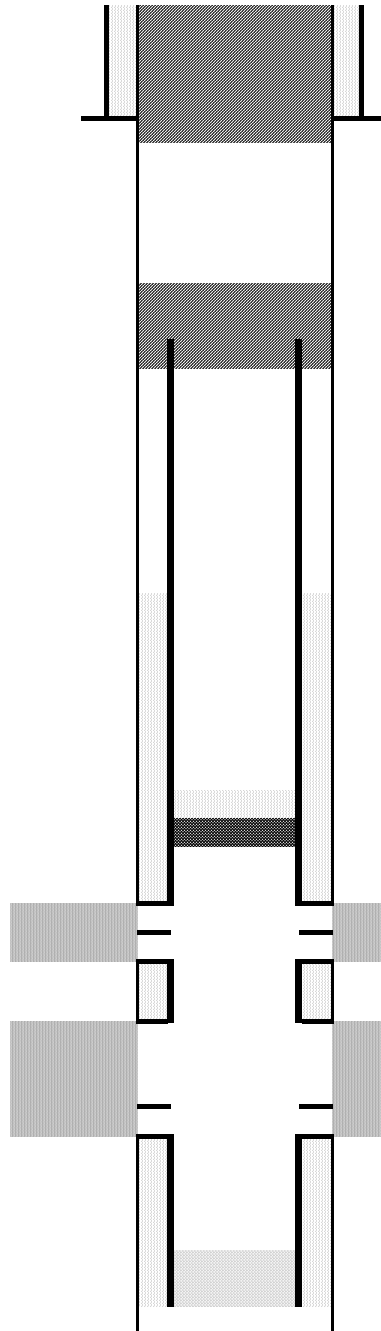

Cut surface casing off 6'-8' below surface.

Pump approx 328 sx shoe plug @ 996'
 Will bring cement to surface.

WW	780	930
FH	551	701
SC	896	996

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

CIBP @ 6740' w/ 2 sx cement on top

Niobrara Perforations:
 6790'-6805'; 6906'-6922'

Codell
 Perforations:
 7082'-7096'

TD: 7267'