

NOBLE ENERGY INC.
 Cervi 11-27
 NWNW 27-4N-63W
 662 FNL & 655 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 5/18/2016

API: 05-123-21002


KB Elev: 4872'
 GL Elev: 4860'

Spud Date: 8/2/2002

Surface Casing :
 8 5/8", 24# @ 620'
 Cement: 430 sx
 TOC: Surface

TOC @ 6292'

Production Casing :
 4 1/2", 11.6# @ 7620'
 Cement: 220 sx
 Run Date: 8/6/2002

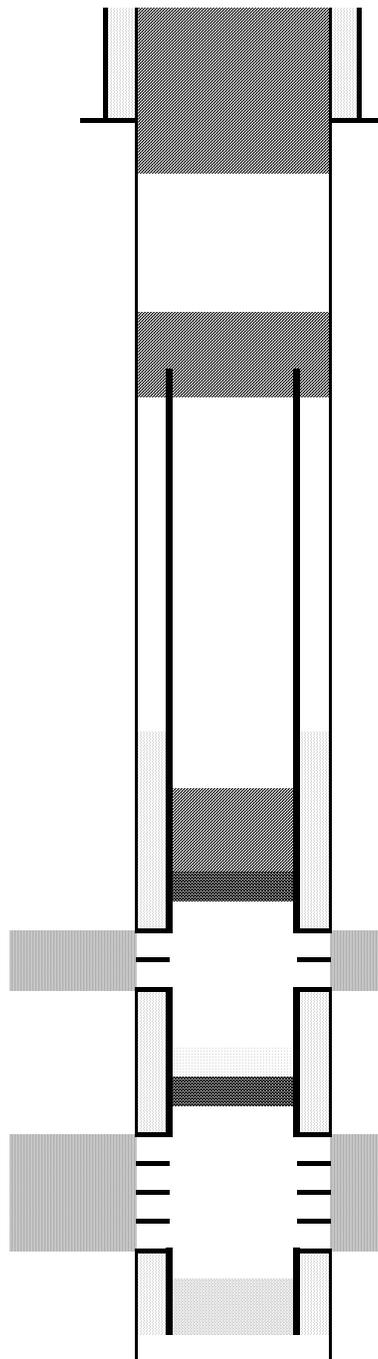

Cut surface casing off 6'-8' below surface.

Pump approx 280 sx shoe plug @ 720'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

Pump 25 sx balance plug to 6400' to cover Niobrara
 CIBP @ 6721'

Codell Perforations: 6771' - 6779'

CIBP @ 7200' (CURRENT)

J Sand Perforations: 7235' - 7250'

Dakota Perforations: 7526' - 7596'

TD: 7620'