

NOBLE ENERGY INC.
 Guttersen 1-4
 NENE 4-2N-64W
 660 FNL & 853 FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 5/9/2016

API: 05-123-19150

KB Elev: 4865'
 GL Elev: 4855'


Spud Date: 4/23/1996

Surface Casing :
 8 5/8", 23# @ 820'
 Cement: 573 sx
 TOC: Surface

TOC @ 3730'

TOC @ 6292'

Production Casing :
 3 1/2", 7.7#, B-70 @ 7156'
 Cement: 325 + 150 sx
 Run Date: 4/27/1996

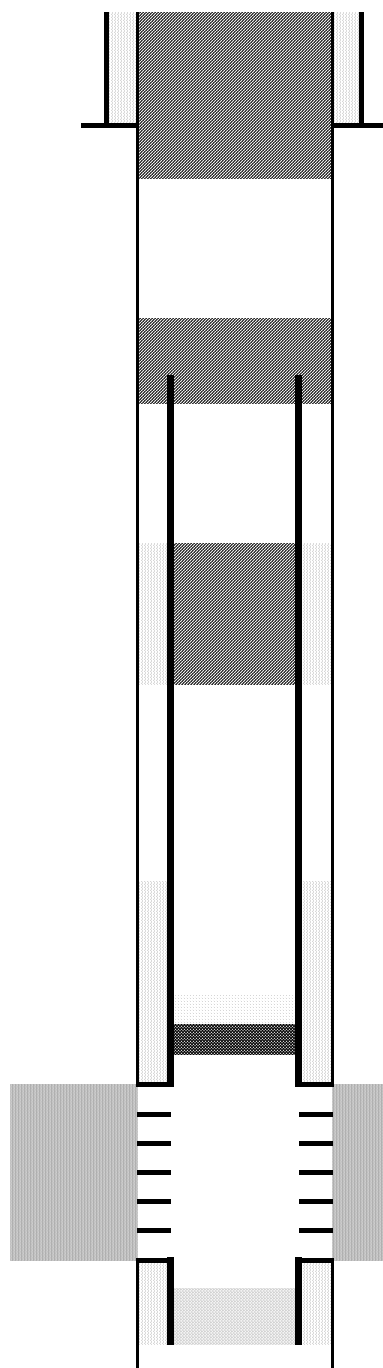

Cut surface casing off 6'-8' below surface.

Pump approx 315 sx shoe plug @ 920'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

Pump 60 sx balance plug from 5030' - 3730'

CIBP @ 6758' w/ 2 sx cement on top

Niobrara Perforations: 6808' - 6922'

Codell Perforations: 7016' - 7026'

TD: 7169'