

NOBLE ENERGY INC.
 Larson A25-05
 SWNW 25-6N-64W
 1980' FNL & 660 FWL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 2/9/2016

API: 05-123-16794
 COGCC #

GL Elev: 4619'
 KB Elev: 4628'

Spud Date: 3/27/1993

Surface Casing :
 8 5/8" 24# @ 351'
 Cement: 320 sx
 TOC: Surface


Remedial Casing Cmt: 3500' to 4228'

Remedial Casing Cmt: 5125' to 5268'
 Casing Patch @ 5240'

TOC @ 5850'

Nio Top 6508'

Production Casing :
 2 7/8" 6.5# N-80 @ 6947'
 Cement: 240 sx
 TD: 6969'

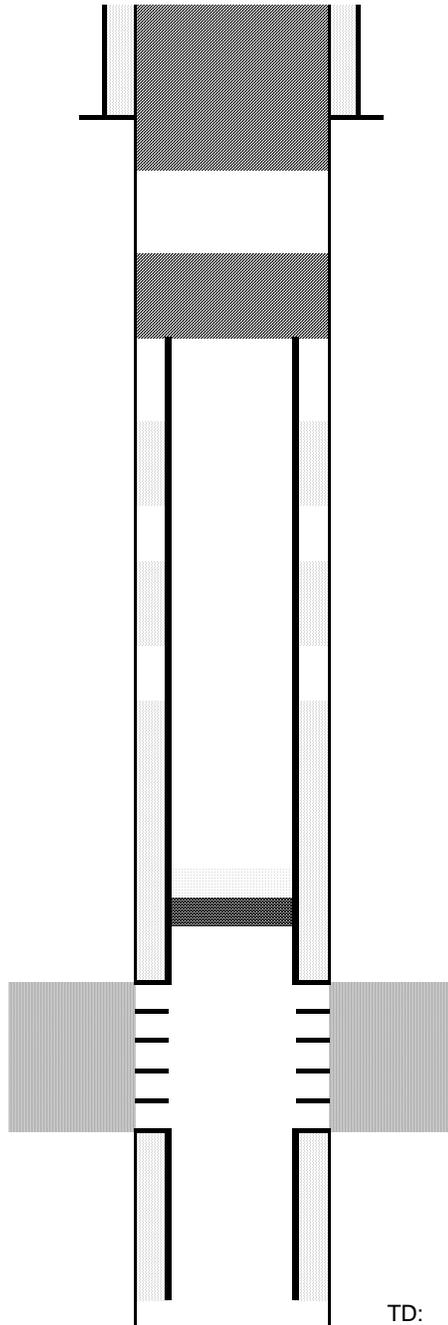

Cut surface casing off 6'-8' below surface.

Pump approx 170 sx shoe plug @ 550'
 Will bring cement to surface.

Pump 100 sx stub plug where csg was pulled
 Cut and pull csg @ 2500'

Pump 15 sx of cement on top of CIBP

CIBP @ 6757'

Codell Perforations 6807' - 6819'

TD: 6969'