

**NOBLE ENERGY INC.**  
 BRUNNER 14-33  
 SWSW 14-6N-64W  
 473 FSL & 685 FWL  
 WELD COUNTY, CO  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 6/14/2016

API: 05-123-21573  
 COGCC #

GL Elev: 4711'  
 KB Elev: 4721'


**Spud Date:**

**Surface Casing :**  
 8-5/8" 24# @ 407'  
 Cement: 225  
 TOC: Surface

**TOC @ 3218'**

**Nio Top 6586'**

**Production Casing :**  
 4-1/2" 11.6# @ 6980'  
 Cement: 385  
 TD: 8/12/2003

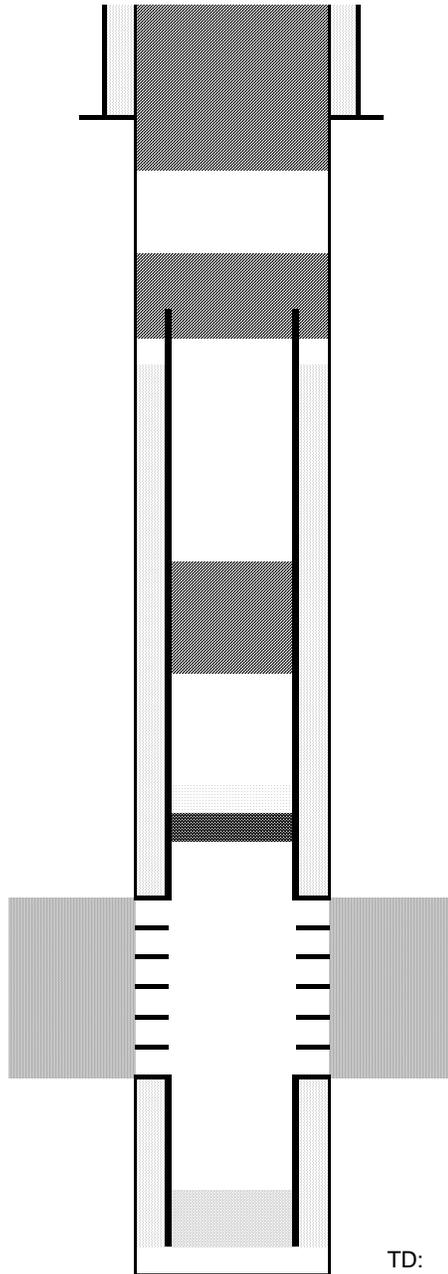

Cut surface casing off 6'-8' below surface.

Pump approx 184 sx shoe plug @ 542'  
 Will bring cement to surface.

Pump 125 sx stub plug where csg was pulled  
 Cut and pull csg @ 2500'

Pump 25 sx balance plug at 6816'.

CIBP @ 6829' w/ 2 sx cement on top

Codell Perforations: 6879'-6892'; 6880'-6890'

TD: 7025'