

NOBLE ENERGY INC.
 McIntosh 42-21
 SENE 21-2N-64W
 1980' FNL & 660' FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 7/1/2016

API: 05-123-22437
 COGCC #

GL Elev: 4948'
 KB Elev: 4962'


Spud Date: 12/5/2004

Surface Casing :
 8-5/8" 24# @ 986'
 Cement: 635 sx
 TOC: Surface

TOC @ 4558'

Nio Top 6786'

Production Casing :
 4-1/2" 11.6# @ 7873'
 Cement: 440 sx
 TD: 12/13/2004

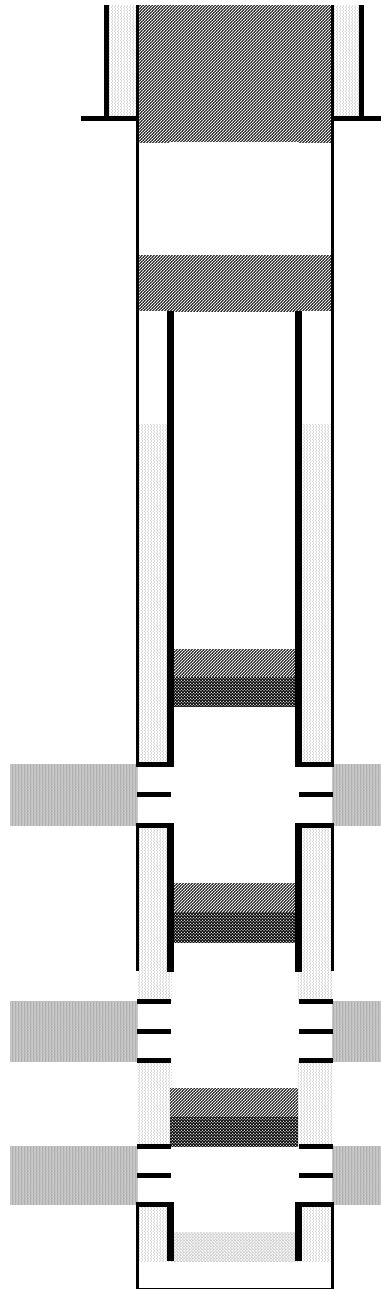

Cut surface casing off 6'-8' below surface.

Pump approx 345 sx shoe plug @ 1086'
 Will bring cement to surface.

Pump 125 sx stub plug @ 2500'
 Cut & pull csg @ 2500'

CIBP @ 7030' w/ 2 sx cement on top

Codell Perforations 7082' - 7096'

CIBP @ 7490' w/ 2 sx cement on top

J Sand Perforations 7536' - 7568'

CIBP @ 7680' w/ 2 sx cement on top
 Dakota Perforations 7734' - 7743'

TD: 7883