

NOBLE ENERGY INC.
 FOSS 14-41
 NESE 14-6N-64W
 2196 FSL & 717 FEL
 WELD COUNTY, CO
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 7/12/2016

API: 05-123-26498
 COGCC #

GL Elev: 4679'
 KB Elev: 4695'

Spud Date:

Surface Casing :


8-5/8" 24# @ 530'
 Cement: 350
 TOC: Surface

TOC @ 1204'

Nio Top 6531'

Production Casing :

4-1/2" 11.6# M-80 @ 6960'
 Cement: 1293
 TD: 11/1/2008

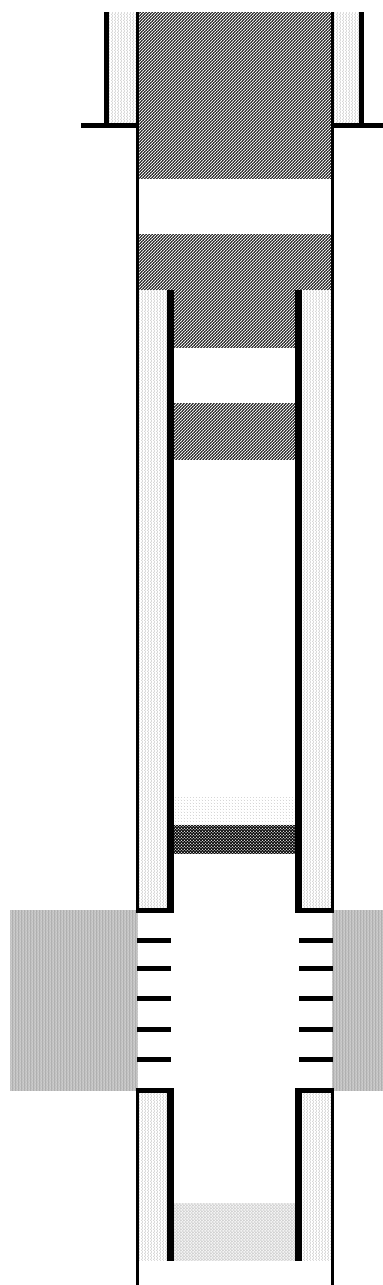

Cut surface casing off 6'-8' below surface.

Pump approx 210 sx shoe plug @ 630'
 Will bring cement to surface.

Pump 125 sx stub plug where csg was pulled
 Cut and pull csg @ ~1200'

Pump 50 sx balance plug @ 2500'.

CIBP @ 6517 ' w/ 2 sx cement on top

Niobrara Perforations:
 6567'-6584'; 6676'-6700'

Codell Perforations: 6855'-6866'

TD: 7021'